(54) Title: MULTIDIRECTIONAL PHOTOREACTIVE ABSORPTION METHOD

(57) Abstract: A method for enhancing photoreactive absorption in a specified volume element of a photoreactive composition. In one embodiment, the method includes: providing a photoreactive composition; providing a source of light (preferably, a pulsed laser) sufficient for simultaneous absorption of at least two photons by the photoreactive composition, the light source having a beam capable of being divided; dividing the light beam into a plurality of equal path length exposure beams; and focusing the exposure beams in a substantially non-counter propagating manner at a single volume element of the photoreactive composition simultaneously to react at least a portion of the photoreactive composition. In another embodiment, a method includes: providing a photoreactive composition capable of photoreactive absorption; and exposing the photoreactive composition to laser light from a plurality of substantially non-counter propagating directions simultaneously, wherein the light overlaps in time and space at a predetermined focus spot.

MULTIDIRECTIONAL PHOTOREACTIVE ABSORPTION METHOD

STATEMENT OF PRIORITY

This application claims the priority of U.S. Provisional Application No. 60/211,708 filed June 15, 2000, the contents of which are hereby incorporated by reference.

FIELD

This invention relates to a method of enhancing the peak power of a light source (e.g., a short pulse laser) used in a photoreactive absorption (e.g., reacting) process, the method comprising splitting the light from the light source into a plurality of parts and focusing the parts at the same volume element of a photoreactive composition from a plurality of directions.

BACKGROUND

Molecular two-photon absorption was predicted by Goppert-Mayer in 1931. Upon the invention of pulsed ruby lasers in 1960, experimental observation of two-photon absorption became a reality. Subsequently, two-photon excitation has found application in biology and optical data storage, as well as in other fields.

There are two key differences between two-photon-induced photoprocesses and single-photon induced processes. Whereas single-photon absorption scales linearly with the intensity of the incident light, two-photon absorption scales quadratically. Higher-order absorptions scale with a related higher power of incident intensity. As a result, it is possible to perform photoreactive processes with three-dimensional spatial resolution. Also, because photoreactive processes involve the simultaneous absorption of two or more photons, the absorbing chromophore is excited with a number of photons whose total energy equals the equals the energy of an excited state of a photoreactive photosensitizer, even though each photon individually has

insufficient energy to excite the chromophore. Because the exciting light is not attenuated by single-photon absorption within a photoreactive matrix or material, it is possible to selectively excite molecules at a greater depth within a material than would be possible via single-photon excitation by use of a beam

5   that is focused to that depth in the material. These two phenomena also apply, for example, to excitation within tissue or other biological materials.

Major benefits have been achieved by applying photoreactive absorption to the areas of photoreacting and microfabrication. For example, in photoreactive lithography or stereolithography, the nonlinear scaling of

10   photoreactive absorption with intensity has provided the ability to write features having a size that is less than the diffraction limit of the light utilized, as well as the ability to write features in three dimensions (which is also of interest for holography). Such work has been limited, however, to slow writing speeds and high laser powers. At high laser powers, one-photon absorption may occur

15   causing local heating and/or sample damage. Thus there is a need to enhance the peak intensity at the volume of interest while keeping the overall intensity low elsewhere.

Furthermore, the z-axis resolution in two photon microfabrication may be limited by the material but more usually is defined by the optics. In most of

20   the published art, the depth of the reacted voxel (the smallest three dimensional volume element) is defined by the numerical aperture (NA) of the focusing optics and is proportional to the square of the NA. The lateral extent of the reacted voxel is directly proportional to the NA, so the depth and width of the reacted voxel cannot be varied independently (at a fixed wavelength). Creating

25   a shallow depth of field necessitates a small lateral dimension to the voxel, and a small voxel means longer writing times for large structures.

S. Hell and E. H. K. Stelzer in "Fundamental Improvement of Resolution With a 4Pi-Confocal Fluorescence Microscope Using Two-Photon Excitation", *Optics Communications*, *93*, 277-282 (1992), describe using

30   interference between two counter propagating beams, that is two beams with the propagating vectors at 180 degrees to each other, to enhance the z-axis resolution in two-photon fluorescence microscopy. In International Publication No. WO 99/54784 by Goodman and Campagnola, the use of two counter

propagating beams is described with regards to enhanced z-axis resolution of a

two photon microfabrication process. The described apparatus involves two

high numerical aperture microscope objectives on opposite sides of a sample on

a moveable stage. Such a configuration allows limited choice in the shape of

5   the reacted region. Furthermore, it may not be used with non-transparent

substrates.

Thus, there is a need for alternative methods of achieving spatial

localization without sacrificing writing speed or flexibility in substrate choice.

in exposing photoreactive absorption compositions.

10

SUMMARY

The present invention provides methods for enhancing photoreactive

absorption in a specified volume element of a photoreactive composition. In

one embodiment, the method includes: providing a photoreactive composition;

15   providing a source of light (preferably, a pulsed laser) sufficient for

simultaneous absorption of at least two photons by the photoreactive

composition, the light source having a beam capable of being divided; dividing

the light beam into a plurality of equal path length exposure beams; and

focusing the exposure beams in a substantially non-counter propagating manner

20   at a single volume element of the photoreactive composition simultaneously to

react at least a portion of the photoreactive composition.

In another embodiment, a method includes: providing a photoreactive

composition capable of photoreactive absorption; and exposing the

photoreactive composition to laser light from a plurality of substantially non-

25   counter propagating directions simultaneously, wherein the light overlaps in

time and space at a predetermined focus spot.

In one embodiment, the photoreactive composition is exposed to the

light source in a manner such that beams of light are directed from opposite

sides of the photoreactive composition. In another embodiment, the beams

30   come from the same side of the composition

It is an advantage of the invention that more efficient use of high power

laser light, for example, in a photoreactive-absorbing process (preferably, one

that involves reacting of a photoreactive composition) can be obtained by

dividing the light beam into a plurality of exposure beams, then directing the exposure beams toward a single focus spot. This can be accomplished by use of an appropriate optical element, such as a beam splitter or a holographic element.

A photoreactive composition of the present invention includes a reactive species, which is preferably a photoreactive species, such as monomers, oligomers, reactive polymers, and mixtures thereof, although non-photoreactive species are also possible. Preferred examples of a curable species include addition-polymerizable monomers and oligomers, addition-crosslinkable polymers, cationically-polymerizable monomers and oligomers, cationically-crosslinkable polymers, and mixtures thereof.

Preferably, the photoreactive composition also includes a photoreactive photosensitizer. Preferably, the photoreactive photosensitizer has a two-photon absorption cross-section greater than about 50×10^{-50} cm^4 sec/photon, more preferably, greater than about 75×10^{-50} cm^4 sec/photon, even more preferably, greater than about 100×10^{-50} cm^4 sec/photon, even more preferably, greater than about 150×10^{-50} cm^4 sec/photon, and most preferably, greater than about 200×10^{-50} cm^4 sec/photon. Preferably, the photoreactive photosensitizer has a two-photon absorption cross-section greater than about 1.5 times that of fluorescein, more preferably, greater than about 2 times that of fluorescein, even more preferably, greater than about 3 times that of fluorescein, and most preferably, greater than about 4 times that of fluorescein.

A preferred photoreactive composition includes about 5% to about 99.79% by weight of the at least one reactive species, about 0.01% to about 10% by weight of the at least one photoreactive photosensitizer, up to about 10% by weight of the at least one electron donor compound, and about 0.1% to about 10% by weight of the at least one photoinitiator, based upon the total weight of solids.

The present invention also provides a method for enhancing photoreactive absorption in a specified volume element of a photoreactive composition, the method including; providing a photoreactive composition; providing light sufficient for simultaneous absorption of at least two photons by the photoreactive composition; the light including at least two exposure beams; focusing the exposure beams in a substantially non-counter propagating manner

at a single volume element of the photoreactive composition simultaneously to react at least a portion of the photoreactive composition. Preferably, the light includes one or more lasers, each of which provides at least one exposure beam.

In preferred embodiments, the methods can utilize optical delay
5   elements to control the relative delay between each pulse and the location of the focal point of each beam.

DEFINITIONS

As used herein:

10   "photoreactive absorption" means simultaneous absorption of two or more photons to reach a reactive, electronic excited state that is energetically inaccessible by the absorption of a single photon of the same energy;

"simultaneous" means two events that occur within the period of 10^{-14} second or less;

15   "electronic excited state" means an electronic state of a molecule that is higher in energy than the molecule's electronic ground state, that is accessible via absorption of light, and that has a lifetime greater than 10^{-13} seconds;

"react" means to effect reacting (polymerization and/or crosslinking) as well as to effect depolymerization or other reactions.

20   "optical system" means a system for controlling light, the system including at least one element chosen from refractive optical elements such as lenses, reflective optical elements such as mirrors, and diffractive optical elements such as gratings. Optical elements shall also include diffusers, wave-guides, and other elements known in the optical arts;

25   "exposure system" means an optical system plus a light source;

"sufficient light" means light of sufficient intensity and appropriate wavelength to effect photoreactive absorption;

"photosensitizer" means a molecule that lowers the energy required to activate a photoinitiator by absorbing light of lower energy than is required by
30   the photoinitiator for activation and interacting with the photoinitiator to produce a photoinitiating species therefrom;

"photochemically effective amounts" (of the components of the photoinitiator system) means amounts sufficient to enable the reactive species to

undergo at least partial reaction under the selected exposure conditions (as evidenced, for example, by a change in density, viscosity, color, pH, refractive index, or other physical or chemical property);

"transit" means passing light completely through a volume of a

5   photoreactive composition; and

"focus" or "focusing" means bringing collimated light to a point or forming an image of an object.

BRIEF DESCRIPTION OF THE DRAWINGS

10   **Figure 1a** illustrates a multidirectional reacting approach wherein 2 beams are incident from the same side of the photoreactive reactive composition.

Figure 1b illustrates a photoreactive composition placed between the focusing lenses so that light beams are incident upon the reacting region from

15   opposite sides of the substrate.

Figures 2 illustrates a multidirectional reacting approach employing diffractive and mico-optical elements extended to more than two beams lying within the same plane or in different planes. The angle between the beams incident upon the photoreactive composition can be changed to alter the overlap

20   cross-section and thus to control the shape of the reacted region.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

A preferred system for photoreactive absorption can include an exposure

25   system that includes a light source and an appropriate optical element, and a photoreactive composition that includes at least one reactive species, at least one photoreactive photosensitizer, optionally at least one electron donor compound, and optionally at least one photoinitiator for the photoreactive composition. The photoinitiator is typically optional except when the reactive

30   species is a cationic resin.

In practice, the method of the present invention can be used to prepare complex, three-dimensional objects by exposure of a photoreactive composition to a light source of sufficient energy to cause a photoreactive composition to

react (e.g., react). Preferably, unreacted material is separated from the desired object by, e.g., washing with a solvent or other art-known means.

A general diagram of a particular embodiment of this multidirectional reacting approach is shown in Figure 1a. Light beam 110 from laser 100 is split

5   into two beams 111 and 112 by beamsplitter 120. Beams 111 and 112 are reflected by mirrors 130a and 130b and 130c, d, e, f, and g, respectively, before being focused by lenses 160b and 160a, respectively, to the same volume element within the photoreactive composition 155. Mirrors 130d and 130e are mounted on translation stage 140 which can be moved to match the pathlengths

10   of the two beams to allow the overlap of the short pulses within the desired reacting volumetric region. The photoreactive composition 155 is mounted onto translation stage 150 so the desired 3-dimensional pattern can be formed within the composition. Figure 1b illustrates the situation where incident beams 170a and 170b (focused by lenses 180a and 180b, respectively) are used to react

15   the same volumetric region within photoreactive composition 190, but are incident from opposite sides of the composition.

Using beams from multiple directions allows greater control over the shape and position of the reacted region or voxel. A voxel is a three-dimensional pixel or volume element, usually the smallest definable volume

20   with a size and shape. When crossing the beams at other than 180 degrees (i.e., substantially non-counter propagating beams), the shape of the reacted voxel can be defined by the crossing region as well as the pulse timing and focal spot position and shape. By moving one of the optical components, the shape and size of the beam can be varied very quickly. Moving an optical component is

25   much easier than changing the pulse length of the laser and can be easier than changing the optical delay time. A further advantage of the invention is that it allows use of lower numerical aperture (NA) optics. Lower NA optics are usually easier to use, have greater working distances (so deeper structures can be made), and are cheaper.

30   Another advantage of the invention is that using more than two beams from non-overlapping directions also increases the contrast of the exposure system. That is, the difference between each individual beam intensity (which

cannot have enough intensity to react the material by itself to stay within the spirit of this invention) and the intensity total of all the beams is much greater.

It is a further advantage of the invention that having multiple beams transit the substantially different volume regions of the material has the

5   potential to increase exposure speed without exceeding the ablation threshold of the material. When in a counter propagating arrangement, the position of the reacted region of a material is defined by the relative timing of the two pulses and the size and position of the two focal spots of the lenses. When using low NA lenses, the voxel cannot be made smaller than about half the length of the

10   peak intensity region of the light pulse. This arrangement does nothing to lower the damage threshold in thermally insulating materials (including polymers, polymer precursors and dyes) less than about 10 mm thick and does very little for damage threshold for insulating materials less than 100 mm thick. Using multiple, *non-counter propagating* beams increases the surface area over which

15   the light is introduced to the sample.

Almost any orientation of the beams can prove useful. Of note are mutually orthogonal beams which can form blocks, symmetrically distributed beams which can form approximate spheres, and nearly counter propagating beams, which can form lines. Using low NA lenses and four beams in a regular

20   tetrahedral arrangement, one can make a large, approximately symmetrical voxel. Using more beams symmetrically arranged would increase the symmetry. The shape of the voxel can then be varied somewhat just by changing the combination of beams used to react the material and adjusting the power levels as necessary to compensate for the missing beams.

25   The reacting material is usually coated on a planar backing. All the beams can come from one side of the plane. This is necessary if any part of the substrate or support is opaque. The beams can come from opposite sides of the material plane if the substrate and all supports are transparent.

The relative polarization of the two beams may be set depending on

30   whether or not optical interference is desired.

This multidirectional reacting approach can be extended to more than two beams lying within the same plane or in different planes. The angle between the beams incident upon the photoreactive composition can be changed

-8-

to alter the overlap cross-section and thus to control the shape of the reacted region. Overlapping beams also provide additional control over the size and shape of the volume at peak power since the region of overlap of two beams depends on the pulse duration and the angle between the beams. This can result in additional z-axis resolution for the process without the constraint imposed by the smaller working distances characteristic of high numerical aperture lenses.

A different embodiment of this multidirectional approach (shown in Figure 2) employs diffractive and micro-optical elements. The diffractive element 210 (a linear grating in this case) splits the incoming beam 200 into several beams 220a – 220e propagating in different directions. Each of these beams passes through a transparent adjustable optical delay element 230a – 230e consisting of an electro-optical material (such as $LiNbO_3$). Altering the voltage applied across this material changes the material refractive index (which in turn changes the effective optical path length). After each beam passes through its individual optical delay element, the beams are incident upon a refractive microlens array 240. The aspheric off-axis lenses in this array steer and focus the incident beams to the same volumetric region 260 within the photoreactive material 250. Introduction of appropriate delay into each beam path allows the overlap of all pulses at the desired location in space and time.

Several variations of the embodiment shown in Figure 2 can be used to produce similar results. A more general diffractive optical element may be used to separate the incident beam into a two-dimensional array of beams instead of using a linear diffraction grating to create a one-dimensional fan of beams. The final focusing/steering refractive microlens array shown in Figure 2 may be replaced with a diffractive optical element performing the same function. A large portion of the system may be constructed as an integrated optical device in which the beam-splitting grating and optical delay elements are constructed using waveguides on a planar substrate (the conventional way $LiNbO_3$ devices are constructed). The electro-optic refractive index control described above may be replaced in an integrated optical system by a fixed optical delay element. However, fine adjustment of the length of each optical path is necessary to compensate for system construction errors in a practical system;

therefore, the tunable system embodiment shown in Figure 2 is preferred to a
fixed system.

The shape and orientation angle of the volume element within the
photoreactive composition that is illuminated by the refractive optical elements

5   can be controlled by appropriate design of the focusing elements (such as by
incorporating off-axis, aspheric, and anamorphic surfaces).

The embodiments of multidirectional exposure described above assume
that each of the light beams incident upon the same volume element within the
photoreactive composition originate from the same laser source. An alternate

10   method of enhancing peak power in the volume of interest is to direct laser
beams from multiple laser sources at the same volume element from different
directions.

In addition to controlling the size and shape of the voxel through the use
of multiple beams that overlap within the reacting region, it is also possible to

15   control the location of the voxel through the appropriate choice of the relative
delay between the beams. As discussed in the background material, WO
99/54784 describes the use of two counter propagating beams for enhanced z-
axis resolution; the exact vertical location of reacting is determined by the
relative delay between the two pulses (which is controlled by a mechanical

20   stage which moves several mirrors within one beam path). In the present
invention, the relative delay between multiple non-counter propagating beams is
used in conjunction with active focal length control (of the focusing lenses) to
determine the location of the reacted voxel within a multiphoton reactive
composition (which may be stationary or moving).

25   One embodiment of this method can be described by considering the
apparatus shown in Figure 2. Placement of a set of optical delay elements
between the refractive microlens array 240 and the multiphoton-reactive (i.e.,
photoreactive) composition 250 (in addition to the optical delay elements 230a
– 230e shown in Figure 2) allows the simultaneous control of the relative delay

30   between each pulse and the location of the focal point of each beam within the
photoreactive composition 250. As before, the optical delay elements 230a –
230e provide the optical delay necessary to control the relative timing of each
pulse so they overlap within the desired voxel. The additional set of optical

delay elements placed into the beams as they are focused changes the focal
point of each lens. Therefore, the use of electro-optical delay elements (such as
LiNbO₃) allows the synchronization of the change in focal position with the
change in pulse delay. Thus, the reacted voxel can be moved vertically (and

5   horizontally to a lesser degree) without requiring translation of the
photoreactive composition. The invention is not limited to static lenses used in
conjunction with electrically-addressable planar optical delay elements to yield
adjustable focal lengths; any devices capable of active focal length control are
understood to be included in the spirit of the present invention.

10   The synchronized combination of active control over the shape of the
reacted voxel (by turning multiple beams on and off and changing the relative
delay between beams) and the location of the reacted voxel (by adjustment of
the focal lengths of the lenses and the relative delay between beams) allows
increased throughput compared to a system in which voxel movement only

15   results from translation of the photoreactive composition.

           Photoreactive compositions useful in the present invention include at
least one reactive species, at least one photoreactive photosensitizer, optionally
at least one electron donor compound, and optionally at least one photoinitiator
for the photoreactive composition.

20

Reactive Species

           Reactive species suitable for use in the photoreactive compositions include both
photoreactive and non-photoreactive species. Photoreactive species are generally
preferred and include, for example, addition-polymerizable monomers and oligomers

25   and addition-crosslinkable polymers (such as free-radically polymerizable or
crosslinkable ethylenically-unsaturated species including, for example, acrylates,
methacrylates, and certain vinyl compounds such as styrenes), as well as cationically-
polymerizable monomers and oligomers and cationically-crosslinkable polymers
(including, for example, epoxies, vinyl ethers, cyanate esters, etc.), and the like, and

30   mixtures thereof.

           Suitable ethylenically-unsaturated species are described, for example, by
Palazzotto et al. in U.S. Patent No. 5,545,676 at column 1, line 65, through column 2,
line 26, and include mono-, di-, and poly-acrylates and methacrylates (for example,

-11-

methyl acrylate, methyl methacrylate, ethyl acrylate, isopropyl methacrylate, n-hexyl acrylate, stearyl acrylate, allyl acrylate, glycerol diacrylate, glycerol triacrylate, ethyleneglycol diacrylate, diethyleneglycol diacrylate, triethyleneglycol dimethacrylate,1,3-propanediol diacrylate, 1,3-propanediol dimethacrylate,

5   trimethylolpropane triacrylate, 1,2,4-butanetriol trimethacrylate, 1,4-cyclohexanediol diacrylate, pentaerythritol triacrylate, pentaerythritol tetraacrylate, pentaerythritol tetramethacrylate, sorbitol hexacrylate, bis[1-(2-acryloxy)]-p-ethoxyphenyldimethylmethane, bis[1-(3-acryloxy-2-hydroxy)]-p-propoxyphenyldimethylmethane, trishydroxyethyl-isocyanurate trimethacrylate, the

10 bis-acrylates and bis-methacrylates of polyethylene glycols of molecular weight about 200-500, copolymerizable mixtures of acrylated monomers such as those of U.S. Patent No. 4,652,274, and acrylated oligomers such as those of U.S. Patent No. 4, 642,126); unsaturated amides (for example, methylene bis-acrylamide, methylene bis-methacrylamide, 1,6-hexamethylene bis-acrylamide, diethylene triamine tris-

15 acrylamide and beta-methacrylaminoethyl methacrylate); vinyl compounds (for example, styrene, diallyl phthalate, divinyl succinate, divinyl adipate, and divinyl phthalate); and the like; and mixtures thereof. Suitable reactive polymers include polymers with pendant (meth)acrylate groups, for example, having from 1 to about 50 (meth)acrylate groups per polymer chain. Examples of such polymers include aromatic

20 acid (meth)acrylate half ester resins such as Sarbox™ resins available from Sartomer (for example, Sarbox™ 400, 401, 402, 404, and 405). Other useful reactive polymers photoreactive by free radical chemistry include those polymers that have a hydrocarbyl backbone and pendant peptide groups with free-radically polymerizable functionality attached thereto, such as those described in U.S. Patent No. 5,235,015 (Ali et al.).

25 Mixtures of two or more monomers, oligomers, and/or reactive polymers can be used if desired. Preferred ethylenically-unsaturated species include acrylates, aromatic acid (meth)acrylate half ester resins, and polymers that have a hydrocarbyl backbone and pendant peptide groups with free-radically polymerizable functionality attached thereto.

Suitable cationically-reactive species are described, for example, by

30 Oxman et al. in U.S. Patent Nos. 5,998,495 and 6,025,406 and include epoxy resins. Such materials, broadly called epoxides, include monomeric epoxy compounds and epoxides of the polymeric type and can be aliphatic, alicyclic, aromatic, or heterocyclic. These materials generally have, on the average, at

least 1 polymerizable epoxy group per molecule (preferably, at least about 1.5
and, more preferably, at least about 2). The polymeric epoxides include linear
polymers having terminal epoxy groups (for example, a diglycidyl ether of a
polyoxyalkylene glycol), polymers having skeletal oxirane units (for example,

5   polybutadiene polyepoxide), and polymers having pendant epoxy groups (for
example, a glycidyl methacrylate polymer or copolymer). The epoxides can be
pure compounds or can be mixtures of compounds containing one, two, or more
epoxy groups per molecule. These epoxy-containing materials can vary greatly
in the nature of their backbone and substituent groups. For example, the

10   backbone can be of any type and substituent groups thereon can be any group
that does not substantially interfere with cationic react at room temperature.
Illustrative of permissible substituent groups include halogens, ester groups,
ethers, sulfonate groups, siloxane groups, nitro groups, phosphate groups, and
the like. The molecular weight of the epoxy-containing materials can vary from

15   about 58 to about 100,000 or more.

        Useful epoxy-containing materials include those which contain
cyclohexene oxide groups such as epoxycyclohexanecarboxylates, typified by
3,4-epoxycyclohexylmethyl-3,4-epoxycyclohexanecarboxylate, 3,4-epoxy-2-
methylcyclohexylmethyl-3,4-epoxy-2-methylcyclohexane carboxylate, and

20   bis(3,4-epoxy-6-methylcyclohexylmethyl) adipate. A more detailed list of
useful epoxides of this nature is set forth in U.S. Patent No. 3,117,099.

        Other epoxy-containing materials that are useful include glycidyl ether
monomers of the formula

25    $$R'(OCH_2 - CH - CH_2)_n$$
$$\diagdown \diagup$$
$$O$$

where R' is alkyl or aryl and n is an integer of 1 to 6. Examples are glycidyl

30   ethers of polyhydric phenols obtained by reacting a polyhydric phenol with an
excess of a chlorohydrin such as epichlorohydrin (for example, the diglycidyl
ether of 2,2-bis-(2,3-epoxypropoxyphenol)-propane). Additional examples of
epoxides of this type are described in U.S. Patent No. 3,018,262, and in

-13-

Handbook of Epoxy Resins, Lee and Neville, McGraw-Hill Book Co., New York (1967).

Numerous commercially available epoxy resins can also be utilized. In particular, epoxides that are readily available include octadecylene oxide,

5   epichlorohydrin, styrene oxide, vinyl cyclohexene oxide, glycidol, glycidylmethacrylate, diglycidyl ethers of Bisphenol A (for example, those available under the trade designations Epon™ 828, Epon™ 825, Epon™ 1004, and Epon™ 1010 from Resolution Performance Products, formerly Shell Chemical Co., as well as DER™-331, DER™-332, and DER™-334 from Dow

10   Chemical Co.), vinylcyclohexene dioxide (for example, ERL-4206 from Union Carbide Corp.), 3,4-epoxycyclohexylmethyl-3,4-epoxycyclohexene carboxylate (for example, ERL-4221 or Cyracure™ UVR 6110 or UVR 6105 from Union Carbide Corp.), 3,4-epoxy-6-methylcyclohexylmethyl-3,4-epoxy-6-methyl-cyclohexene carboxylate (for example, ERL-4201 from Union Carbide Corp.),

15   bis(3,4-epoxy-6-methylcyclohexylmethyl) adipate (for example, ERL-4289 from Union Carbide Corp.), bis(2,3-epoxycyclopentyl) ether (for example, ERL-0400 from Union Carbide Corp.), aliphatic epoxy modified from polypropylene glycol (for example, ERL-4050 and ERL-4052 from Union Carbide Corp.), dipentene dioxide (for example, ERL-4269 from Union Carbide

20   Corp.), epoxidized polybutadiene (for example, Oxiron™ 2001 from FMC Corp.), silicone resin containing epoxy functionality, flame retardant epoxy resins (for example, DER™-580, a brominated bisphenol type epoxy resin available from Dow Chemical Co.), 1,4-butanediol diglycidyl ether of phenolformaldehyde novolak (for example, DEN™-431 and DEN™-438 from

25   Dow Chemical Co.), resorcinol diglycidyl ether (for example, Kopoxite™ from Koppers Company, Inc.), bis(3,4-epoxycyclohexyl)adipate (for example, ERL-4299 or UVR-6128, from Union Carbide Corp.), 2-(3,4-epoxycyclohexyl-5, 5-spiro-3,4-epoxy) cyclohexane-meta-dioxane (for example, ERL-4234 from Union Carbide Corp.), vinylcyclohexene monoxide 1,2-epoxyhexadecane (for

30   example, UVR-6216 from Union Carbide Corp.), alkyl glycidyl ethers such as alkyl C_8-C_{10} glycidyl ether (for example, Heloxy™ Modifier 7 from Resolution Performance Products), alkyl C_{12}-C_{14} glycidyl ether (for example, Heloxy™ Modifier 8 from Resolution Performance Products), butyl glycidyl ether (for

example, Heloxy™ Modifier 61 from Resolution Performance Products), cresyl glycidyl ether (for example, Heloxy™ Modifier 62 from Resolution Performance Products), p-tert-butylphenyl glycidyl ether (for example, Heloxy™ Modifier 65 from Resolution Performance Products), polyfunctional

5   glycidyl ethers such as diglycidyl ether of 1,4-butanediol (for example, Heloxy™ Modifier 67 from Resolution Performance Products), diglycidyl ether of neopentyl glycol (for example, Heloxy™ Modifier 68 from Resolution Performance Products), diglycidyl ether of cyclohexanedimethanol (for example, Heloxy™ Modifier 107 from Resolution Performance Products),

10   trimethylol ethane triglycidyl ether (for example, Heloxy™ Modifier 44 from Resolution Performance Products), trimethylol propane triglycidyl ether (for example, Heloxy™ Modifier 48 from Resolution Performance Products), polyglycidyl ether of an aliphatic polyol (for example, Heloxy™ Modifier 84 from Resolution Performance Products), polyglycol diepoxide (for example,

15   Heloxy™ Modifier 32 from Resolution Performance Products), bisphenol F epoxides (for example, Epon™-1138 or GY-281 from Ciba-Geigy Corp.), and 9,9-bis[4-(2,3-epoxypropoxy)-phenyl]fluorenone (for example, Epon™ 1079 from Resolution Performance Products).

Other useful epoxy resins comprise copolymers of acrylic acid esters of

20   glycidol (such as glycidylacrylate and glycidylmethacrylate) with one or more copolymerizable vinyl compounds. Examples of such copolymers are 1:1 styrene-glycidylmethacrylate, 1:1 methylmethacrylate-glycidylacrylate, and a 62.5:24:13.5 methylmethacrylate-ethyl acrylate-glycidylmethacrylate. Other useful epoxy resins are well known and contain such epoxides as

25   epichlorohydrins, alkylene oxides (for example, propylene oxide), styrene oxide, alkenyl oxides (for example, butadiene oxide), and glycidyl esters (for example, ethyl glycidate).

Useful epoxy-functional polymers include epoxy-functional silicones such as those described in U.S. Patent No. 4,279,717 (Eckberg), which are

30   commercially available from the General Electric Company. These are polydimethylsiloxanes in which 1-20 mole % of the silicon atoms have been substituted with epoxyalkyl groups (preferably, epoxy cyclohexylethyl, as described in U.S. Patent No. 5,753,346 (Kessel)).

-15-

Blends of various epoxy-containing materials can also be utilized. Such blends can comprise two or more weight average molecular weight distributions of epoxy-containing compounds (such as low molecular weight (below 200), intermediate molecular weight (about 200 to 10,000), and higher molecular

5 weight (above about 10,000)). Alternatively or additionally, the epoxy resin can contain a blend of epoxy-containing materials having different chemical natures (such as aliphatic and aromatic) or functionalities (such as polar and non-polar). Other cationically-reactive polymers (such as vinyl ethers and the like) can additionally be incorporated, if desired.

10 Preferred epoxies include aromatic glycidyl epoxies (such as the Epon™ resins available from Resolution Performance Products) and cycloaliphatic epoxies (such as ERL-4221 and ERL-4299 available from Union Carbide).

Suitable cationally-reactive species also include vinyl ether monomers, oligomers, and reactive polymers (for example, methyl vinyl ether, ethyl vinyl

15 ether, tert-butyl vinyl ether, isobutyl vinyl ether, triethyleneglycol divinyl ether (Rapi-Cure™ DVE-3, available from International Specialty Products, Wayne, NJ), trimethylolpropane trivinyl ether (TMPTVE, available from BASF Corp., Mount Olive, NJ), and the Vectomer™ divinyl ether resins from Allied Signal (for example, Vectomer™ 2010, Vectomer™ 2020, Vectomer™ 4010, and

20 Vectomer™ 4020 and their equivalents available from other manufacturers)), and mixtures thereof. Blends (in any proportion) of one or more vinyl ether resins and/or one or more epoxy resins can also be utilized. Polyhydroxy-functional materials (such as those described, for example, in U.S. Patent No. 5,856,373 (Kaisaki et al.)) can also be utilized in combination with epoxy-

25 and/or vinyl ether-functional materials.

Non-photoreactive species include, for example, reactive polymers whose solubility can be increased upon acid- or radical-induced reaction. Such reactive polymers include, for example, aqueous insoluble polymers bearing ester groups that can be converted by photogenerated acid to aqueous soluble

30 acid groups (for example, poly(4-*tert*-butoxycarbonyloxystyrene). Non-photoreactive species also include the chemically-amplified photoresists described by R. D. Allen, G. M. Wallraff, W. D. Hinsberg, and L. L. Simpson in "High Performance Acrylic Polymers for Chemically Amplified Photoresist

Applications," *J. Vac. Sci. Technol. B, 9*, 3357 (1991). The chemically-
amplified photoresist concept is now widely used for microchip manufacturing,
especially with sub-0.5 micron (or even sub-0.2 micron) features. In such
photoresist systems, catalytic species (typically hydrogen ions) can be

5   generated by irradiation, which induces a cascade of chemical reactions. This
cascade occurs when hydrogen ions initiate reactions that generate more
hydrogen ions or other acidic species, thereby amplifying reaction rate.
Examples of typical acid-catalyzed chemically-amplified photoresist systems
include deprotection (for example, t-butoxycarbonyloxystyrene resists as

10 described in U.S. Patent No. 4,491,628, tetrahydropyran (THP) methacrylate-
based materials, THP-phenolic materials such as those described in U.S. Patent
No. 3,779,778, t-butyl methacrylate-based materials such as those described by
R. D Allen et al. in *Proc. SPIE, 2438*, 474 (1995), and the like);
depolymerization (for example, polyphthalaldehyde-based materials); and

15 rearrangement (for example, materials based on the pinacol rearrangements).

    Useful non-photoreactive species also include leuco dyes, which tend to
be colorless until they are oxidized by acid generated by the photoreactive
photoinitiator system, and which, once oxidized, exhibit a visible color.
(Oxidized dyes are colored by virtue of their absorbance of light in the visible

20 portion of the electromagnetic spectrum (approximately 400-700 nm).) Leuco
dyes useful in the present invention are those that are reactive or oxidizable
under moderate oxidizing conditions and yet that are not so reactive as to
oxidize under common environmental conditions. There are many such
chemical classes of leuco dyes known to the imaging chemist.

25   Leuco dyes useful as reactive species in the present invention include
acrylated leuco azine, phenoxazine, and phenothiazine, which can, in part, be
represented by the structural formula:

wherein X is selected from O, S, and -N-R^{11}, with S being preferred;

R^1 and R^2 are independently selected from H and alkyl groups of 1 to about 4

carbon atoms; R^3, R^4, R^6, and R^7 are independently selected from H and alkyl

5   groups of 1 to about 4 carbon atoms, preferably methyl; R^5 is selected from

alkyl groups of 1 to about 16 carbon atoms, alkoxy groups of 1 to about 16

carbon atoms, and aryl groups of up to about 16 carbon atoms; R^8 is selected

from   -N(R^1)(R^2), H, alkyl groups of 1 to about 4 carbon atoms, wherein R^1

and R^2 are independently selected and defined as above; R^9 and R^{10} are

10   independently selected from H and alkyl groups of 1 to about 4 carbon atoms;

and R^{11} is selected from alkyl groups of 1 to about 4 carbon atoms and aryl

groups of up to about 11 carbon atoms (preferably, phenyl groups). The

following compounds are examples of this type of leuco dye:

Copichem II

15

20   Other useful leuco dyes include, but are not limited to, Leuco Crystal

Violet (4,4',4"-methylidynetris-(N,N-dimethylaniline)), Leuco Malachite Green

(p,p'-benzylidenebis-(N,N-dimethylaniline)), Leuco Atacryl Orange-LGM

(Color Index Basic Orange 21, Comp. No. 48035 (a Fischer's base type

compound)) having the structure

-18-

Leuco Atacryl Brilliant Red-4G (Color Index Basic Red 14) having the structure

Leuco Atacryl Yellow-R (Color Index Basic Yellow 11, Comp. No. 48055) having the structure

Leuco Ethyl Violet (4,4',4"-methylidynetris-(N,N-diethylaniline), Leuco Victoria Blu-BGO (Color Index Basic Blue 728a, Comp. No. 44040; 4,4'-methylidynebis-(N,N,-dimethylaniline)-4-(N-ethyl-1-napthalamine)), and LeucoAtlantic Fuchsine Crude (4,4',4"-methylidynetris-aniline).

The leuco dye(s) can generally be present at levels of at least about 0.01% by weight of the total weight of a light sensitive layer (preferably, at least about 0.3% by weight; more preferably, at least about 1% by weight; most preferably, at least about 2% to 10% or more by weight). Other materials such as binders, plasticizers, stabilizers, surfactants, antistatic agents, coating aids, lubricants, fillers, and the like can also be present in the light sensitive layer. One of skill in the art can readily determine the desirable amount of additives. For example, the amount of filler is chosen such that there is no undesirable scatter at the writing wavelength.

If desired, mixtures of different types of reactive species can be utilized in the photoreactive compositions. For example, mixtures of free-radically-reactive species and cationically-reactive species, mixtures of photoreactive species and non-photoreactive species, and so forth, are also useful.

-19-

Photoinitiator System

(1) Photoreactive Photosensitizers

Photoreactive photosensitizers suitable for use in the photoreactive photoinitiator system of the photoreactive compositions are those that are capable of simultaneously absorbing at least two photons when exposed to sufficient light. Preferably, they have a two-photon absorption cross-section greater than that of fluorescein (that is, greater than that of 3', 6'-dihydroxyspiro[isobenzofuran-1(3H), 9'- [9H]xanthen]3-one). Generally, the cross-section can be greater than about 50×10^{-50} cm^4 sec/photon, as measured by the method described by C. Xu and W. W. Webb in *J. Opt. Soc. Am. B, 13*, 481 (1996) (which is referenced by Marder and Perry et al. in International Publication No. WO 98/21521 at page 85, lines 18-22).

This method involves the comparison (under identical excitation intensity and photosensitizer concentration conditions) of the two-photon fluorescence intensity of the photosensitizer with that of a reference compound. The reference compound can be selected to match as closely as possible the spectral range covered by the photosensitizer absorption and fluorescence. In one possible experimental set-up, an excitation beam can be split into two arms, with 50% of the excitation intensity going to the photosensitizer and 50% to the reference compound. The relative fluorescence intensity of the photosensitizer with respect to the reference compound can then be measured using two photomultiplier tubes or other calibrated detector. Finally, the fluorescence quantum efficiency of both compounds can be measured under one-photon excitation.

Methods of determining fluorescence and phosphorescence quantum yields are well-known in the art. Typically, the area under the fluorescence (or phosphorescence) spectrum of a compound of interest is compared with the area under the fluorescence (or phosphorescence) spectrum of a standard luminescent compound having a known fluorescence (or phosphorescence) quantum yield, and appropriate corrections are made (which take into account, for example, the optical density of the composition at the excitation wavelength, the geometry of the fluorescence detection apparatus, the differences in the emission wavelengths, and the response of the detector to different

wavelengths). Standard methods are described, for example, by I. B. Berlman in *Handbook of Fluorescence Spectra of Aromatic Molecules*, Second Edition, pages 24-27, Academic Press, New York (1971); by J. N. Demas and G. A. Crosby in *J. Phys. Chem.*, 75, 991-1024 (1971); and by J. V. Morris, M. A.

5   Mahoney, and J. R. Huber in *J. Phys. Chem.*, 80, 969-974 (1976).

Assuming that the emitting state is the same under one- and two-photon excitation (a common assumption), the two-photon absorption cross-section of the photosensitizer, (δ_{sam}), is equal to δ_{ref} K (I_{sam}/I_{ref})($\varphi_{sam}/\varphi_{ref}$), wherein δ_{ref} is the two-photon absorption cross-section of the reference compound, I_{sam}

10   is the fluorescence intensity of the photosensitizer, I_{ref} is the fluorescence intensity of the reference compound, φ_{sam} is the fluorescence quantum efficiency of the photosensitizer, φ_{ref} is the fluorescence quantum efficiency of the reference compound, and K is a correction factor to account for slight differences in the optical path and response of the two detectors. K can be

15   determined by measuring the response with the same photosensitizer in both the sample and reference arms. To ensure a valid measurement, the clear quadratic dependence of the two-photon fluorescence intensity on excitation power can be confirmed, and relatively low concentrations of both the photosensitizer and the reference compound can be utilized (to avoid fluorescence reabsorption and

20   photosensitizer aggregation effects).

When the photosensitizer is not fluorescent, the yield of electronic excited states can to be measured and compared with a known standard. In addition to the above-described method of determining fluorescence yield, various methods of measuring excited state yield are known (including, for

25   example, transient absorbance, phosphorescence yield, photoproduct formation or disappearance of photosensitizer (from photoreaction), and the like).

Preferably, the two-photon absorption cross-section of the photosensitizer is greater than about 1.5 times that of fluorescein (or, alternatively, greater than about 75 x 10^{-50} cm^4 sec/photon, as measured by the above method); more preferably, greater

30   than about twice that of fluorescein (or, alternatively, greater than about 100 x 10^{-50} cm^4 sec/photon); most preferably, greater than about three times that of fluorescein (or, alternatively, greater than about 150 x 10^{-50} cm^4 sec/photon); and optimally, greater than

-21-

about four times that of fluorescein (or, alternatively, greater than about $200 \times 10^{-50}\,cm^4$ sec/photon).

Preferably, the photosensitizer is soluble in the reactive species (if the reactive species is liquid) or is compatible with the reactive species and with any binders (as

5   described below) that are included in the composition. Most preferably, the photosensitizer is also capable of sensitizing 2-methyl-4,6-bis(trichloromethyl)-s-triazine under continuous irradiation in a wavelength range that overlaps the single photon absorption spectrum of the photosensitizer (single photon absorption conditions), using the test procedure described in U.S. Pat. No. 3,729,313. Using

10   currently available materials, that test can be carried out as follows:

A standard test solution can be prepared having the following composition: 5.0 parts of a 5% (weight by volume) solution in methanol of 45,000-55,000 molecular weight, 9.0-13.0% hydroxyl content polyvinyl butyral (Butvar™ B76, Monsanto); 0.3 parts trimethylolpropane trimethacrylate; and 0.03 parts 2-methyl-4,6-

15   bis(trichloromethyl)-s-triazine (see Bull. Chem. Soc. Japan, 42, 2924-2930 (1969)). To this solution can be added 0.01 parts of the compound to be tested as a photosensitizer. The resulting solution can then be knife-coated onto a 0.05 mm clear polyester film using a knife orifice of 0.05 mm, and the coating can be air dried for about 30 minutes. A 0.05 mm clear polyester cover film can be carefully placed over

20   the dried but soft and tacky coating with minimum entrapment of air. The resulting sandwich construction can then be exposed for three minutes to 161,000 Lux of incident light from a tungsten light source providing light in both the visible and ultraviolet range (FCH™ 650 watt quartz-iodine lamp, General Electric). Exposure can be made through a stencil so as to provide exposed and unexposed areas in the

25   construction. After exposure the cover film can be removed, and the coating can be treated with a finely divided colored powder, such as a color toner powder of the type conventionally used in xerography. If the tested compound is a photosensitizer, the trimethylolpropane trimethacrylate monomer will be polymerized in the light-exposed areas by the light-generated free radicals from the

30   2-methyl-4,6-bis(trichloromethyl)-s-triazine. Since the polymerized areas will be essentially tack-free, the colored powder will selectively adhere essentially only to the tacky, unexposed areas of the coating, providing a visual image corresponding to that in the stencil.
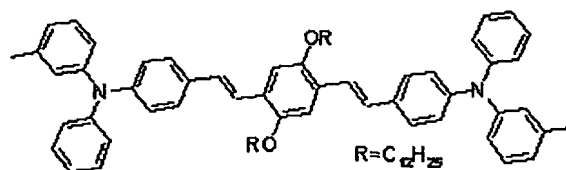
Preferably, a photosensitizer can also be selected based in part upon shelf stability considerations. Accordingly, selection of a particular photosensitizer can depend to some extent upon the particular reactive species utilized (as well as upon the choices of electron donor compound and/or photoinitiator).

5   Particularly preferred photoreactive photosensitizers include those exhibiting large photoreactive absorption cross-sections, such as Rhodamine B (that is, N-[9-(2-carboxyphenyl)-6-(diethylamino)-3H-xanthen-3-ylidene]-N-ethylethanaminium chloride, and the hexafluoroantimonate salt of Rhodamine B) and the four classes of photosensitizers described, for example, by Marder

10   and Perry et al. in International Patent Publication Nos. WO 98/21521 and WO 99/53242. The four classes can be described as follows: (a) molecules in which two donors are connected to a conjugated π (pi)-electron bridge; (b) molecules in which two donors are connected to a conjugated π (pi)-electron bridge which is substituted with one or more electron accepting groups; (c) molecules in

15   which two acceptors are connected to a conjugated π (pi)-electron bridge; and (d) molecules in which two acceptors are connected to a conjugated π (pi)-electron bridge which is substituted with one or more electron donating groups (where "bridge" means a molecular fragment that connects two or more chemical groups, "donor" means an atom or group of atoms with a low

20   ionization potential that can be bonded to a conjugated π (pi)-electron bridge, and "acceptor" means an atom or group of atoms with a high electron affinity that can be bonded to a conjugated π (pi)-electron bridge).
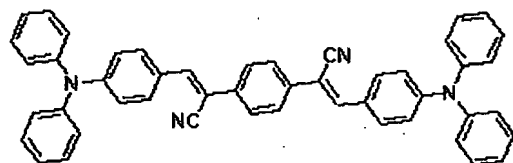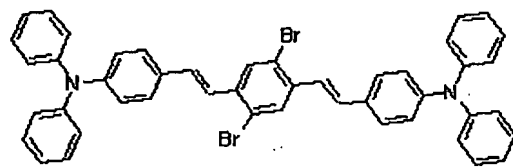
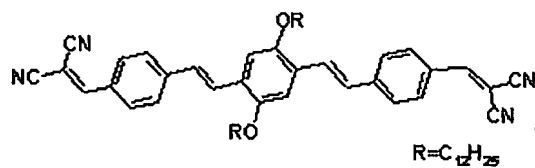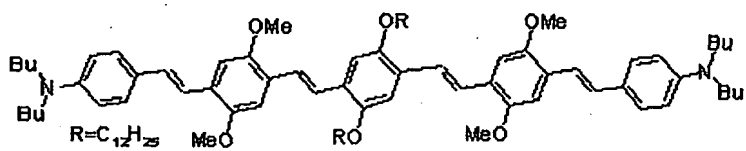Representative examples of such photosensitizers include:

25

5

10

5

10

15

5

10

15

BuO—⟨◯⟩—CH=CH—⟨◯⟩—OBu

5

MeO—⟨◯⟩(MeO)(MeO)—CH=CH—⟨◯⟩—O–Bu

Me_2N—⟨◯⟩—[CH=CH]$_4$—⟨◯⟩—N(n-Bu)$_2$

10

Me_2N—⟨◯⟩—[CH=CH]$_2$—⟨◯⟩—N(n-Bu)$_2$

(Ph)$_2$N—⟨◯⟩—CH=CH—⟨◯⟩—N(Ph)$_2$

15

Et_2N—(xanthene)—$^+$NEt$_2$ X$^-$ where X$^-$ = Cl$^-$, PF$_6^-$, SbF$_6^-$, AsF$_6^-$, BF$_4^-$, CF$_3$SO$_3^-$

with CO$_2$H substituent
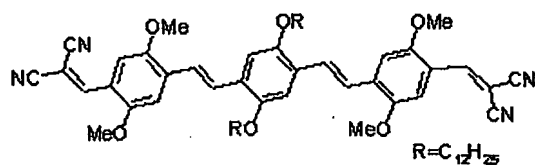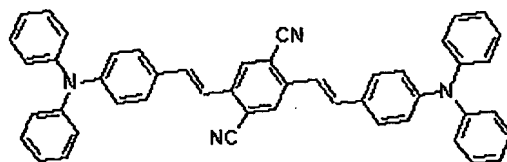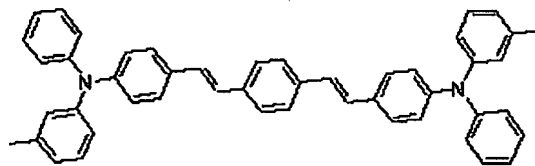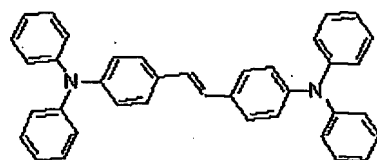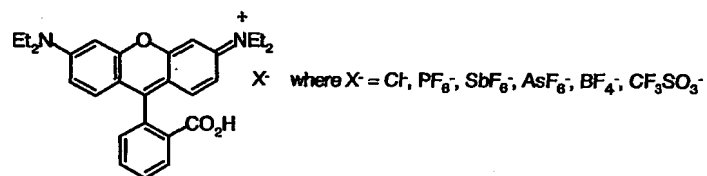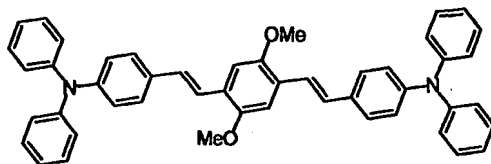
The four above-described classes of photosensitizers can be prepared by reacting aldehydes with ylides under standard Wittig conditions or by using the McMurray reaction, as detailed in International Patent Publication No. WO 98/21521.

Other compounds are described by Reinhardt et al. (for example, in U.S. Patent Nos. 6,100,405, 5,859,251, and 5,770,737) as having large photoreactive absorption cross-sections, although these cross-sections were determined by a method other than that described above. Representative examples of such compounds include:

R=R=C2H5, C10H21, C18H37

$R = C_2H_5$

$R = C_2H_5$

5

$R = C_2H_5$

$R1 = C_2H_5$
$R2 = C_{10}H_{21}$

10

$R = C_{10}H_{21}$

$R = C_{10}H_{21}$
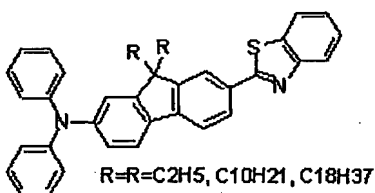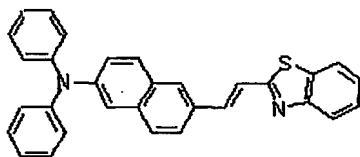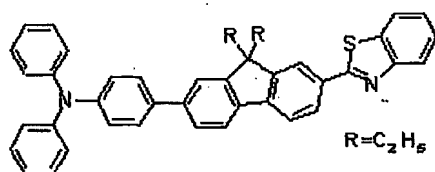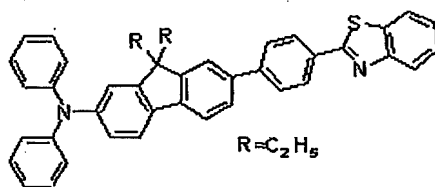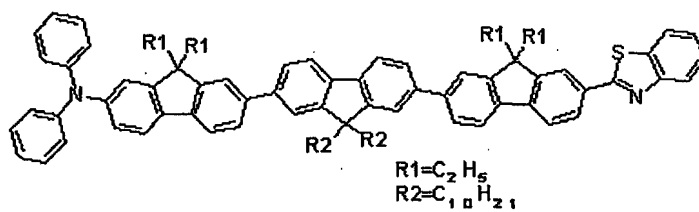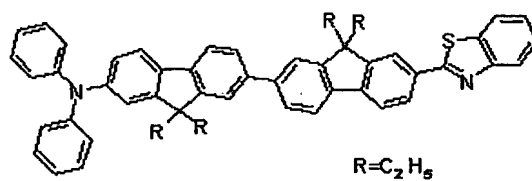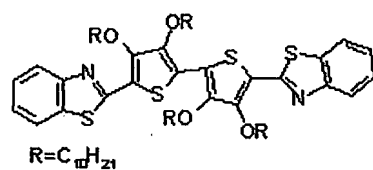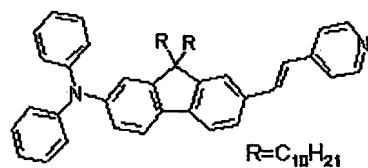
Other compounds which may be useful as photosensitizers in the present

invention include but are not limited to fluorescein, p-bis(o-

5   methylstyryl)benzene, eosin, rose Bengal, erythrosin, Coumarin 307 (Eastman

Kodak), Cascade Blue hydrazide trisodium salt, Lucifer Yellow CH ammonium

salt, 4,4-difluoro-1,3,5,7,8-pentamethyl-4-bora-3α,4α-diazaindacene-2,6-

disulfonic acid disodium salt, 1,1-dioctadecyl-3,3,3',3'-

tetramethylindocarbocyanine perchlorate, Indo-1 pentapotassium salt

10   (Molecular Probes), 5-dimethylaminonaphthalene-1-sulfonyl hydrazine, 4',6-

diamidino-2-phenylindole dihydrochloride, 5,7-diiodo-3-butoxy-6-fluorone, 9-

fluorenone-2-carboxylic acid, and compounds having the following structures:

R=C$_2$H$_5$

R=C$_2$H$_5$

R=C$_{10}$H$_{21}$

R=C$_{10}$H$_{21}$

$R=C_{10}H_{21}$

$R=C_{10}H_{21}$

$R=C_{10}H_{21}$

$R=C_{10}H_{21}$

X =
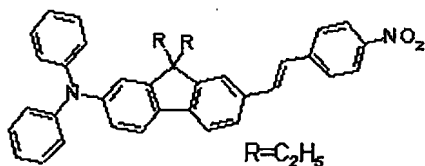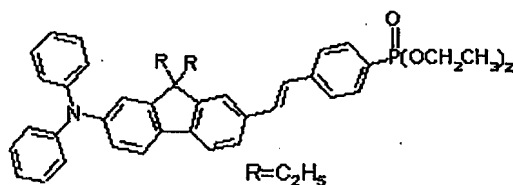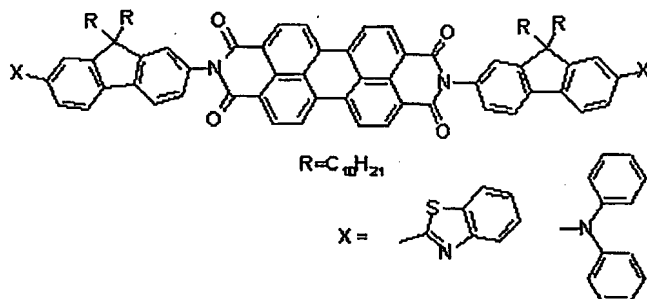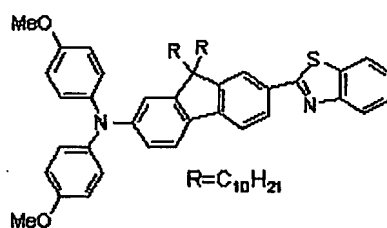
(2) Electron Donor Compounds

Electron donor compounds useful in the photoreactive photoinitiator system of the photoreactive compositions are those compounds (other than the photosensitizer itself) that are capable of donating an electron to an electronic excited state of the photosensitizer. The electron donor compounds preferably have an oxidation potential that is greater than zero and less than or equal to that of p-dimethoxybenzene vs. a standard saturated calomel electrode. Preferably,

the oxidation potential is between about 0.3 and 1 volt vs. a standard saturated calomel electrode ("S.C.E.").

The electron donor compound is also preferably soluble in the reactive species and is selected based in part upon shelf stability considerations (as
5   described above). Suitable donors are generally capable of increasing the speed of reaction (e.g., react) or the image density of a photoreactive composition upon exposure to light of the desired wavelength.

When working with cationically-reactive species, those skilled in the art will recognize that the electron donor compound, if of significant basicity, can
10   adversely affect the cationic reaction. (See, for example, the discussion in U.S. Patent No. 6,025,406 (Oxman et al.) at column 7, line 62, through column 8, line 49.)

In general, electron donor compounds suitable for use with particular photosensitizers and photoinitiators can be selected by comparing the oxidation
15   and reduction potentials of the three components (as described, for example, in U.S. Patent No. 4,859,572 (Farid et al.)). Such potentials can be measured experimentally (for example, by the methods described by R. J. Cox, *Photographic Sensitivity*, Chapter 15, Academic Press (1973)) or can be obtained from references such as N. L. Weinburg, Ed., *Technique of*
20   *Electroorganic Synthesis Part II Techniques of Chemistry*, Vol. V (1975), and C. K. Mann and K. K. Barnes, *Electrochemical Reactions in Nonaqueous Systems* (1970). The potentials reflect relative energy relationships and can be used in the following manner to guide electron donor compound selection.

When the photosensitizer is in an electronic excited state, an electron in
25   the highest occupied molecular orbital (HOMO) of the photosensitizer has been lifted to a higher energy level (namely, the lowest unoccupied molecular orbital (LUMO) of the photosensitizer), and a vacancy is left behind in the molecular orbital it initially occupied. The photoinitiator can accept the electron from the higher energy orbital, and the electron donor compound can donate an electron
30   to fill the vacancy in the originally occupied orbital, provided that certain relative energy relationships are satisfied.

If the reduction potential of the photoinitiator is less negative (or more positive) than that of the photosensitizer, an electron in the higher energy orbital

-32-

of the photosensitizer is readily transferred from the photosensitizer to the
lowest unoccupied molecular orbital (LUMO) of the photoinitiator, since this
represents an exothermic process. Even if the process is instead slightly
endothermic (that is, even if the reduction potential of the photosensitizer is up

5　　to 0.1 volt more negative than that of the photoinitiator) ambient thermal
activation can readily overcome such a small barrier.

In an analogous manner, if the oxidation potential of the electron donor
compound is less positive (or more negative) than that of the photosensitizer, an
electron moving from the HOMO of the electron donor compound to the orbital

10　　vacancy in the photosensitizer is moving from a higher to a lower potential,
which again represents an exothermic process. Even if the process is slightly
endothermic (that is, even if the oxidation potential of the photosensitizer is up
to 0.1 volt more positive than that of the electron donor compound), ambient
thermal activation can readily overcome such a small barrier.

15　　Slightly endothermic reactions in which the reduction potential of the
photosensitizer is up to 0.1 volt more negative than that of the photoinitiator, or
the oxidation potential of the photosensitizer is up to 0.1 volt more positive than
that of the electron donor compound, occur in every instance, regardless of
whether the photoinitiator or the electron donor compound first reacts with the

20　　photosensitizer in its excited state. When the photoinitiator or the electron donor
compound is reacting with the photosensitizer in its excited state, it is preferred
that the reaction be exothermic or only slightly endothermic. When the
photoinitiator or the electron donor compound is reacting with the
photosensitizer ion radical, exothermic reactions are still preferred, but still

25　　more endothermic reactions can be expected in many instances to occur. Thus,
the reduction potential of the photosensitizer can be up to 0.2 volt (or more)
more negative than that of a second-to-react photoinitiator, or the oxidation
potential of the photosensitizer can be up to 0.2 volt (or more) more positive
than that of a second-to-react electron donor compound.

30　　Suitable electron donor compounds include, for example, those
described by D. F. Eaton in *Advances in Photochemistry*, edited by B. Voman et
al., Volume 13, pp. 427-488, John Wiley and Sons, New York (1986); by
Oxman et al. in U.S. Patent No. 6,025,406 at column 7, lines 42-61; and by

-33-

Palazzotto et al. in U.S. Patent No. 5, 545,676 at column 4, line 14 through column 5, line 18. Such electron donor compounds include amines (including triethanolamine, hydrazine, 1,4-diazabicyclo[2.2.2]octane, triphenylamine (and its triphenylphosphine and triphenylarsine analogs), aminoaldehydes, and

5   aminosilanes), amides (including phosphoramides), ethers (including thioethers), ureas (including thioureas), sulfinic acids and their salts, salts of ferrocyanide, ascorbic acid and its salts, dithiocarbamic acid and its salts, salts of xanthates, salts of ethylene diamine tetraacetic acid, salts of (alkyl)$_n$(aryl)$_m$borates (n + m = 4) (tetraalkylammonium salts preferred),

10 various organometallic compounds such as SnR$_4$ compounds (where each R is independently chosen from among alkyl, aralkyl (particularly, benzyl), aryl, and alkaryl groups) (for example, such compounds as n-C$_3$H$_7$Sn(CH$_3$)$_3$, (allyl)Sn(CH$_3$)$_3$, and (benzyl)Sn(n-C$_3$H$_7$)$_3$), ferrocene, and the like, and mixtures thereof. The electron donor compound can be unsubstituted or can be

15 substituted with one or more non-interfering substituents. Particularly preferred electron donor compounds contain an electron donor atom (such as a nitrogen, oxygen, phosphorus, or sulfur atom) and an abstractable hydrogen atom bonded to a carbon or silicon atom alpha to the electron donor atom.

    Preferred amine electron donor compounds include alkyl-, aryl-, alkaryl-

20 and aralkyl-amines (for example, methylamine, ethylamine, propylamine, butylamine, triethanolamine, amylamine, hexylamine, 2,4-dimethylaniline, 2,3-dimethylaniline, o-, m- and p-toluidine, benzylamine, aminopyridine, N,N'-dimethylethylenediamine, N,N'-diethylethylenediamine, N,N'-dibenzylethylenediamine, N,N'-diethyl-1,3-propanediamine, N,N'-diethyl-2-

25 butene-1,4-diamine, N,N'-dimethyl-1,6-hexanediamine, piperazine, 4,4'-trimethylenedipiperidine, 4,4'-ethylenedipiperidine, p-N,N-dimethyl-aminophenethanol and p-N-dimethylaminobenzonitrile); aminoaldehydes (for example, p-N,N-dimethylaminobenzaldehyde, p-N,N-diethylaminobenzaldehyde, 9-julolidine carboxaldehyde, and 4-

30 morpholinobenzaldehyde); and aminosilanes (for example, trimethylsilylmorpholine, trimethylsilylpiperidine, bis(dimethylamino)diphenylsilane, tris(dimethylamino)methylsilane, N,N-diethylaminotrimethylsilane, tris(dimethylamino)phenylsilane,

-34-

tris(methylsilyl)amine, tris(dimethylsilyl)amine, bis(dimethylsilyl)amine, N,N-bis(dimethylsilyl)aniline, N-phenyl-N-dimethylsilylaniline, and N,N-dimethyl-N-dimethylsilylamine); and mixtures thereof. Tertiary aromatic alkylamines, particularly those having at least one electron-withdrawing group on the

5   aromatic ring, have been found to provide especially good shelf stability. Good shelf stability has also been obtained using amines that are solids at room temperature. Good photographic speed has been obtained using amines that contain one or more julolidinyl moieties.

Preferred amide electron donor compounds include N,N-dimethylacetamide,

10 N,N-diethylacetamide, N-methyl-N-phenylacetamide, hexamethylphosphoramide, hexaethylphosphoramide, hexapropylphosphoramide, trimorpholinophosphine oxide, tripiperidinophosphine oxide, and mixtures thereof.

Preferred alkylarylborate salts include

$Ar_3B^-(n-C_4H_9)N^+(C_2H_5)_4$

15 $Ar_3B^-(n-C_4H_9)N^+(CH_3)_4$

$Ar_3B^-(n-C_4H_9)N^+(n-C_4H_9)_4$

$Ar_3B^-(n-C_4H_9)Li^+$

$Ar_3B^-(n-C_4H_9)N^+(C_6H_{13})_4$

$Ar_3B^--(C_4H_9)N^+(CH_3)_3(CH_2)_2CO_2(CH_2)_2CH_3$

20 $Ar_3B^--(C_4H_9)N^+(CH_3)_3(CH_2)_2OCO(CH_2)_2CH_3$

$Ar_3B^--(sec-C_4H_9)N^+(CH_3)_3(CH_2)_2CO_2(CH_2)_2CH_3$

$Ar_3B^--(sec-C_4H_9)N^+(C_6H_{13})_4$

$Ar_3B^--(C_4H_9)N^+(C_8H_{17})_4$

$Ar_3B^--(C_4H_9)N^+(CH_3)_4$

25 $(p-CH_3O-C_6H_4)_3B^-(n-C_4H_9)N^+(n-C_4H_9)_4$

$Ar_3B^--(C_4H_9)N^+(CH_3)_3(CH_2)_2OH$

$ArB^-(n-C_4H_9)_3N^+(CH_3)_4$

$ArB^-(C_2H_5)_3N^+(CH_3)_4$

$Ar_2B^-(n-C_4H_9)_2N^+(CH_3)_4$

30 $Ar_3B^-(C_4H_9)N^+(C_4H_9)_4$

$Ar_4B^-N^+(C_4H_9)_4$

$ArB^-(CH_3)_3N^+(CH_3)_4$

$(n\text{-}C_4H_9)_4B^-N^+(CH_3)_4$

$Ar_3B^-(C_4H_9)P^+(C_4H_9)_4$

(where Ar is phenyl, naphthyl, substituted (preferably, fluoro-substituted) phenyl, substituted naphthyl, and like groups having greater numbers of fused aromatic rings), as well as tetramethylammonium n-butyltriphenylborate and tetrabutylammonium n-hexyl-tris(3-fluorophenyl)borate (available as CGI 437 and CGI 746 from Ciba Specialty Chemicals Corporation), and mixtures thereof.

Suitable ether electron donor compounds include 4,4'-dimethoxybiphenyl, 1,2,4-trimethoxybenzene, 1,2,4,5-tetramethoxybenzene, and the like, and mixtures thereof. Suitable urea electron donor compounds include N,N'-dimethylurea, N,N-dimethylurea, N,N'-diphenylurea, tetramethylthiourea, tetraethylthiourea, tetra-n-butylthiourea, N,N-di-n-butylthiourea, N,N'-di-n-butylthiourea, N,N-diphenylthiourea, N,N'-diphenyl-N,N'-diethylthiourea, and the like, and mixtures thereof.

Preferred electron donor compounds for free radical-induced reactions include amines that contain one or more julolidinyl moieties, alkylarylborate salts, and salts of aromatic sulfinic acids. However, for such reactions, the electron donor compound can also be omitted, if desired (for example, to improve the shelf stability of the photoreactive composition or to modify resolution, contrast, and reciprocity). Preferred electron donor compounds for acid-induced reactions include 4-dimethylaminobenzoic acid, ethyl 4-dimethylaminobenzoate, 3-dimethylaminobenzoic acid, 4-dimethylaminobenzoin, 4-dimethylaminobenzaldehyde, 4-dimethylaminobenzonitrile, 4-dimethylaminophenethyl alcohol, and 1,2,4-trimethoxybenzene.

(3) Photoinitiators

Suitable photoinitiators for the reactive species of the photoreactive compositions are those that are capable of being photosensitized by accepting an electron from an electronic excited state of the photoreactive photosensitizer, resulting in the formation of at least one free radical and/or acid. Such photoinitiators include iodonium salts (for example, diaryliodonium salts), chloromethylated triazines (for

example, 2-methyl-4,6-bis(trichloromethyl)-s-triazine, 2,4,6-tris(trichloromethyl)-s-triazine, and 2-aryl-4,6-bis(trichloromethyl)-s-triazine), diazonium salts (for example, phenyldiazonium salts optionally substituted with groups such as alkyl, alkoxy, halo, or nitro), sulfonium salts (for example, triarylsulfonium salts optionally substituted with

5   alkyl or alkoxy groups, and optionally having 2,2' oxy groups bridging adjacent aryl moieties), azinium salts (for example, an N-alkoxypyridinium salt), and triarylimidazolyl dimers (preferably, 2,4,5-triphenylimidazolyl dimers such as 2,2',4,4',5,5'-tetraphenyl-1,1'-biimidazole, optionally substituted with groups such as alkyl, alkoxy, or halo), and the like, and mixtures thereof.

10   The photoinitiator is preferably soluble in the reactive species and is preferably shelf-stable (that is, does not spontaneously promote reaction of the reactive species when dissolved therein in the presence of the photosensitizer and the electron donor compound). Accordingly, selection of a particular photoinitiator can depend to some extent upon the particular reactive species,

15   photosensitizer, and electron donor compound chosen, as described above. Preferred photoinitiators are those that exhibit large photoreactive adsorption cross-sections, as described, *e.g.*, by Marder, Perry et al., in PCT Patent Applications WO 98/21521 and WO 995/3242, and by Goodman et al., in PCT Patent Application WO 99/54784.

20   Suitable iodonium salts include those described by Palazzotto et al. in U.S. Patent No. 5,545,676 at column 2, lines 28 through 46. Suitable iodonium salts are also described in U.S. Patent Nos. 3,729,313, 3,741,769, 3,808,006, 4,250,053 and 4,394,403. The iodonium salt can be a simple salt (for example, containing an anion such as Cl^-, Br^-, I^- or $C_4H_5 SO_3^-$) or a metal complex salt (for example, containing SbF_6^-

25   , PF_6^-, BF_4^-, tetrakis(perfluorophenyl)borate, $SbF_5 OH^-$ or AsF_6^-). Mixtures of iodonium salts can be used if desired.

Examples of useful aromatic iodonium complex salt photoinitiators include diphenyliodonium tetrafluoroborate; di(4-methylphenyl)iodonium tetrafluoroborate; phenyl-4-methylphenyliodonium tetrafluoroborate; di(4-heptylphenyl)iodonium

30   tetrafluoroborate; di(3-nitrophenyl)iodonium hexafluorophosphate; di(4-chlorophenyl)iodonium hexafluorophosphate; di(naphthyl)iodonium tetrafluoroborate; di(4-trifluoromethylphenyl)iodonium tetrafluoroborate; diphenyliodonium hexafluorophosphate; di(4-methylphenyl)iodonium hexafluorophosphate;

-37-

diphenyliodonium hexafluoroarsenate; di(4-phenoxyphenyl)iodonium tetrafluoroborate; phenyl-2-thienyliodonium hexafluorophosphate; 3,5-dimethylpyrazolyl-4-phenyliodonium hexafluorophosphate; diphenyliodonium hexafluoroantimonate; 2,2'-diphenyliodonium tetrafluoroborate; di(2,4-

5   dichlorophenyl)iodonium hexafluorophosphate; di(4-bromophenyl)iodonium hexafluorophosphate; di(4-methoxyphenyl)iodonium hexafluorophosphate; di(3-carboxyphenyl)iodonium hexafluorophosphate; di(3-methoxycarbonylphenyl)iodonium hexafluorophosphate; di(3-methoxysulfonylphenyl)iodonium hexafluorophosphate; di(4-acetamidophenyl)iodonium hexafluorophosphate; di(2-benzothienyl)iodonium

10 hexafluorophosphate; and diphenyliodonium hexafluoroantimonate; and the like; and mixtures thereof. Aromatic iodonium complex salts can be prepared by metathesis of corresponding aromatic iodonium simple salts (such as, for example, diphenyliodonium bisulfate) in accordance with the teachings of Beringer et al., *J. Am. Chem. Soc.*, *81*, 342 (1959).

15   Preferred iodonium salts include diphenyliodonium salts (such as diphenyliodonium chloride, diphenyliodonium hexafluorophosphate, and diphenyliodonium tetrafluoroborate), diaryliodonium hexafluoroantimonate (for example, SarCat™ SR 1012 available from Sartomer Company), and mixtures thereof.

20   Useful chloromethylated triazines include those described in U.S. Patent No. 3,779,778 (Smith et al.) at column 8, lines 45-50, which include 2,4-bis(trichloromethyl)-6-methyl-s-triazine, 2,4,6-tris(trichloromethyl)-s-triazine, and the more preferred chromophore-substituted vinylhalomethyl-s-triazines disclosed in U.S. Patent Nos. 3,987,037 and 3,954,475 (Bonham et al.).

25   Useful diazonium salts include those described in U.S. Patent No. 4,394,433 (Gatzke), which comprise a light sensitive aromatic moiety (for example, pyrrolidine, morpholine, aniline, and diphenyl amine) with an external diazonium group ($-N^+=N$) and an anion (for example, chloride, tri-isopropyl naphthalene sulfonate, tetrafluoroborate, and the

30 bis(perfluoroalkylsulfonyl)methides) associated therewith. Examples of useful diazonium cations include 1-diazo-4-anilinobenzene, N-(4-diazo-2,4-dimethoxy phenyl)pyrrolidine, 1-diazo-2,4-diethoxy-4-morpholino benzene, 1-diazo-4-benzoyl amino-2,5-diethoxy benzene, 4-diazo-2,5-dibutoxy phenyl morpholino,

4-diazo-1-dimethyl aniline, 1-diazo-N,N-dimethylaniline, 1-diazo-4-N-methyl-N-hydroxyethyl aniline, and the like.

Useful sulfonium salts include those described in U.S. Patent No. 4,250,053 (Smith) at column 1, line 66, through column 4, line 2, which can be
5   represented by the formulas:

or

10

wherein R_1, R_2, and R_3 are each independently selected from aromatic groups

having from about 4 to about 20 carbon atoms (for example, substituted or

unsubstituted phenyl, naphthyl, thienyl, and furanyl, where substitution can be

15   with such groups as alkoxy, alkylthio, arylthio, halogen, and so forth) and alkyl

groups having from 1 to about 20 carbon atoms. As used here, the term "alkyl"

includes substituted alkyl (for example, substituted with such groups as halogen,

hydroxy, alkoxy, or aryl). At least one of R_1, R_2, and R_3 is aromatic, and,

preferably, each is independently aromatic. Z is selected from the group

20   consisting of a covalent bond, oxygen, sulfur, -S(=O)- , -C(=O)- , -(O=)S(=O)- ,

and -N(R)- , where R is aryl (of about 6 to about 20 carbons, such as phenyl),

acyl (of about 2 to about 20 carbons, such as acetyl, benzoyl, and so forth), a

carbon-to-carbon bond, or $-(R_4-)C(-R_5)-$, where R_4 and R_5 are independently

selected from the group consisting of hydrogen, alkyl groups having from 1 to

25   about 4 carbon atoms, and alkenyl groups having from about 2 to about 4

carbon atoms, and X^- is as described below.

Suitable anions, X^-, for the sulfonium salts (and for any of the other

types of photoinitiators) include a variety of anion types such as, for example,

imide, methide, boron-centered, phosphorous-centered, antimony-centered,

30   arsenic-centered, and aluminum-centered anions.

Illustrative, but not limiting, examples of suitable imide and methide anions include $(C_2F_5SO_2)_2N^-$, $(C_4F_9SO_2)_2N^-$, $(C_8F_{17}SO_2)_3C^-$, $(CF_3SO_2)_3C^-$, $(CF_3SO_2)_2N^-$, $(C_4F_9SO_2)_3C^-$, $(CF_3SO_2)_2(C_4F_9SO_2)C^-$, $(CF_3SO_2)(C_4F_9SO_2)N^-$, $((CF_3)_2NC_2F_4SO_2)_2N^-$, $(CF_3)_2NC_2F_4SO_2C^-(SO_2CF_3)_2$, (3,5-

5 bis$(CF_3)C_6H_3)SO_2N^-SO_2CF_3$, $C_6H_5SO_2C^-(SO_2CF_3)_2$, $C_6H_5SO_2N^-SO_2CF_3$, and the like. Preferred anions of this type include those represented by the formula $(R_fSO_2)_3C^-$, wherein R_f is a perfluoroalkyl radical having from 1 to about 4 carbon atoms.

Illustrative, but not limiting, examples of suitable boron-centered anions

10 include F_4B^-, $(3,5$-bis$(CF_3)C_6H_3)_4B^-$, $(C_6F_5)_4B^-$, $(p$-$CF_3C_6H_4)_4B^-$, $(m$-$CF_3C_6H_4)_4B^-$, $(p$-$FC_6H_4)_4B^-$, $(C_6F_5)_3(CH_3)B^-$, $(C_6F_5)_3(n$-$C_4H_9)B^-$, $(p$-$CH_3C_6H_4)_3(C_6F_5)B^-$, $(C_6F_5)_3FB^-$, $(C_6H_5)_3(C_6F_5)B^-$, $(CH_3)_2(p$-$CF_3C_6H_4)_2B^-$, $(C_6F_5)_3(n$-$C_{18}H_{37}O)B^-$, and the like. Preferred boron-centered anions generally contain 3 or more halogen-substituted aromatic hydrocarbon radicals attached to

15 boron, with fluorine being the most preferred halogen. Illustrative, but not limiting, examples of the preferred anions include $(3,5$-bis$(CF_3)C_6H_3)_4B^-$, $(C_6F_5)_4B^-$, $(C_6F_5)_3(n$-$C_4H_9)B^-$, $(C_6F_5)_3FB^-$, and $(C_6F_5)_3(CH_3)B^-$.

Suitable anions containing other metal or metalloid centers include, for example, $(3,5$-bis$(CF_3)C_6H_3)_4Al^-$, $(C_6F_5)_4Al^-$, $(C_6F_5)_2F_4P^-$, $(C_6F_5)F_5P^-$, F_6P^-,

20 $(C_6F_5)F_5Sb^-$, F_6Sb^-, $(HO)F_5Sb^-$, and F_6As^-. The foregoing lists are not intended to be exhaustive, as other useful boron-centered nonnucleophilic salts, as well as other useful anions containing other metals or metalloids, will be readily apparent (from the foregoing general formulas) to those skilled in the art.

Preferably, the anion, X^-, is selected from tetrafluoroborate,

25 hexafluorophosphate, hexafluoroarsenate, hexafluoroantimonate, and hydroxypentafluoroantimonate (for example, for use with cationically-reactive species such as epoxy resins).

Examples of suitable sulfonium salt photoinitiators include: triphenylsulfonium tetrafluoroborate

methyldiphenylsulfonium tetrafluoroborate

dimethylphenylsulfonium hexafluorophosphate

triphenylsulfonium hexafluorophosphate

triphenylsulfonium hexafluoroantimonate

5   diphenylnaphthylsulfonium hexafluoroarsenate

tritolysulfonium hexafluorophosphate

anisyldiphenylsulfonium hexafluoroantimonate

4-butoxyphenyldiphenylsulfonium tetrafluoroborate

4-chlorophenyldiphenylsulfonium hexafluorophosphate

10   tri(4-phenoxyphenyl)sulfonium hexafluorophosphate

di(4-ethoxyphenyl)methylsulfonium hexafluoroarsenate

4-acetonylphenyldiphenylsulfonium tetrafluoroborate

4-thiomethoxyphenyldiphenylsulfonium hexafluorophosphate

di(methoxysulfonylphenyl)methylsulfonium hexafluoroantimonate

15   di(nitrophenyl)phenylsulfonium hexafluoroantimonate

di(carbomethoxyphenyl)methylsulfonium hexafluorophosphate

4-acetamidophenyldiphenylsulfonium tetrafluoroborate

dimethylnaphthylsulfonium hexafluorophosphate

trifluoromethyldiphenylsulfonium tetrafluoroborate

20   p-(phenylthiophenyl)diphenylsulfonium hexafluoroantimonate

10-methylphenoxathiinium hexafluorophosphate

5-methylthianthrenium hexafluorophosphate

10-phenyl-9,9-dimethylthioxanthenium hexafluorophosphate

10-phenyl-9-oxothioxanthenium tetrafluoroborate

25   5-methyl-10-oxothianthrenium tetrafluoroborate

5-methyl-10,10-dioxothianthrenium hexafluorophosphate

Preferred sulfonium salts include triaryl-substituted salts such as triarylsulfonium hexafluoroantimonate (for example, SarCat™ SR1010 available from Sartomer Company), triarylsulfonium hexafluorophosphate (for

30   example, SarCat™ SR 1011 available from Sartomer Company), and triarylsulfonium hexafluoroantimonate (for example, SarCat™ K185 available from Sartomer Company).

Useful azinium salts include those described in U.S. Patent No.
4,859,572 (Farid et al.) at column 8, line 51, through column 9, line 46, which
include an azinium moiety, such as a pyridinium, diazinium, or triazinium
moiety. The azinium moiety can include one or more aromatic rings, typically

5   carbocyclic aromatic rings (for example, quinolinium, isoquinolinium,
benzodiazinium, and naphthodiazonium moieties), fused with an azinium ring.
A quaternizing substituent of a nitrogen atom in the azinium ring can be
released as a free radical upon electron transfer from the electronic excited state
of the photosensitizer to the azinium photoinitiator. In one preferred form, the

10 quaternizing substituent is an oxy substituent. The oxy substituent, -O-T, which
quaternizes a ring nitrogen atom of the azinium moiety can be selected from
among a variety of synthetically convenient oxy substituents. The moiety T
can, for example, be an alkyl radical, such as methyl, ethyl, butyl, and so forth.
The alkyl radical can be substituted. For example, aralkyl (for example, benzyl

15 and phenethyl) and sulfoalkyl (for example, sulfomethyl) radicals can be useful.
In another form, T can be an acyl radical, such as an $-OC(O)-T^1$ radical, where
T^1 can be any of the various alkyl and aralkyl radicals described above. In
addition, T^1 can be an aryl radical, such as phenyl or naphthyl. The aryl radical
can in turn be substituted. For example, T^1 can be a tolyl or xylyl radical. T

20 typically contains from 1 to about 18 carbon atoms, with alkyl moieties in each
instance above preferably being lower alkyl moieties and aryl moieties in each
instance preferably containing about 6 to about 10 carbon atoms. Highest
activity levels have been realized when the oxy substituent, -O-T, contains 1 or
2 carbon atoms. The azinium nuclei need include no substituent other than the

25 quaternizing substituent. However, the presence of other substituents is not
detrimental to the activity of these photoinitiators.

Useful triarylimidazolyl dimers include those described in U.S. Patent
No. 4,963,471 (Trout et al.) at column 8, lines 18-28. These dimers include, for
example, 2-(o-chlorophenyl)-4,5-bis(m-methoxyphenyl)-1,1'-biimidazole; 2,2'-

30 bis(o-chlorophenyl)-4,4',5,5'-tetraphenyl-1,1'-biimidazole; and 2,5-bis(o-
chlorophenyl)-4-[3,4-dimethoxyphenyl]-1,1'-biimidazole.

Preferred photoinitiators include iodonium salts (more preferably,
aryliodonium salts), chloromethylated triazines, triarylimidazolyl dimers (more

-42-

preferably, 2,4,5-triphenylimidazolyl dimers), sulfonium salts, and diazonium
salts. More preferred are aryliodonium salts, chloromethylated triazines, and
the 2,4,5-triphenylimidazolyl dimers (with aryliodonium salts and the triazines
being most preferred).

5

Preparation of Photoreactive Composition

The reactive species, photoreactive photosensitizers, electron donor
compounds, and photoinitiators can be prepared by the methods described
above or by other methods known in the art, and many are commercially

10   available. These four components can be combined under "safe light"
conditions using any order and manner of combination (optionally, with stirring
or agitation), although it is sometimes preferable (from a shelf life and thermal
stability standpoint) to add the photoinitiator last (and after any heating step that
is optionally used to facilitate dissolution of other components). Solvent can be

15   used, if desired, provided that the solvent is chosen so as to not react
appreciably with the components of the composition. Suitable solvents include,
for example, acetone, dichloromethane, and acetonitrile. The reactive species
itself can also sometimes serve as a solvent for the other components.

The components of the photoinitiator system are present in

20   photochemically effective amounts (as defined above). Generally, the
composition contains at least about 5%, preferably at least about 10%, and more
preferably, at least about 20%, by weight of one or more reactive species.
Generally, the composition contains up to about 99.79%, preferably up to about
95%, and more preferably up to about 80%, by weight of one or more reactive

25   species. Generally, the composition contains at least about 0.01%, preferably at
least about 0.1%, more preferably, at least about 0.2%, by weight of one or
more photosensitizers. Generally, the composition contains up to about 10%,
preferably up to about 5%, and more preferably up to about 2%, by weight of
one or more photosensitizers. Preferably, the composition contains at least

30   about 0.1% by weight of one or more electron donors. Preferably, the
composition contains up to about 10%, and preferably up to about 5%, by
weight of one or more electron donors. Preferably, the composition contains at
least about 0.1% by weight of one or more photoinitiators. Preferably, the

-43-

composition contains up to about 10%, and preferably up to about 5%, by weight of one or more photoinitiators. When the reactive species is a leuco dye, the composition generally can contain at least about 0.01%, preferably at least about 0.3%, more preferably at least about 1%, and most preferably at least

5   about 2%, by weight of one or more leuco dyes. When the reactive species is a leuco dye, the composition generally can contain up to about 10% by weight of one or more leuco dyes. These percentages are based on the total weight of solids, i.e., the total weight of components other than solvent.

           A wide variety of adjuvants can be included in the photoreactive

10   compositions, depending upon the desired end use. Suitable adjuvants include solvents, diluents, resins, binders, plasticizers, pigments, dyes, inorganic or organic reinforcing or extending fillers (at preferred amounts of about 10% to 90% by weight based on the total weight of the composition), thixotropic agents, indicators, inhibitors, stabilizers, ultraviolet absorbers, medicaments (for

15   example, leachable fluorides), and the like. The amounts and types of such adjuvants and their manner of addition to the compositions will be familiar to those skilled in the art.

           It is within the scope of this invention to include nonreactive polymeric binders in the compositions in order, for example, to control viscosity and to

20   provide film-forming properties. Such polymeric binders can generally be chosen to be compatible with the reactive species. For example, polymeric binders that are soluble in the same solvent that is used for the reactive species, and that are free of functional groups that can adversely affect the course of reaction of the reactive species, can be utilized. Binders can be of a molecular

25   weight suitable to achieve desired film-forming properties and solution rheology (for example, molecular weights between about 5,000 and 1,000,000 daltons; preferably between about 10,000 and 500,000 daltons; more preferably, between about 15,000 and 250,000 daltons). Suitable polymeric binders include, for example, polystyrene, poly(methyl methacrylate), poly(styrene)-co-

30   (acrylonitrile), cellulose acetate butyrate, and the like.

           Prior to exposure, the resulting photoreactive compositions can be coated on a substrate, if desired, by any of a variety of coating methods known to those skilled in the art (including, for example, knife coating and spin

coating). The substrate can be chosen from a wide variety of films, sheets, and other surfaces, depending upon the particular application and the method of exposure to be utilized. Preferred substrates are generally sufficiently flat to enable the preparation of a layer of photoreactive composition having a uniform

5   thickness. For applications where coating is less desirable, the photoreactive compositions can alternatively be exposed in bulk form.

Exposure System and Its Use

          Useful exposure systems include at least one light source (usually a
10   pulsed laser) and at least one optical element. Suitable light sources include, for example, femtosecond near-infrared titanium sapphire oscillators (for example, a Coherent Mira Optima 900-F) pumped by an argon ion laser (for example, a Coherent Innova). This laser, operating at 76 MHz, has a pulse width of less than 200 femtoseconds, is tunable between 700 and 980 nm, and has average
15   power up to 1.4 Watts. However, in practice, any light source that provides sufficient intensity (to effect photoreactive absorption) at a wavelength appropriate for the photosensitizer (used in the photoreactive composition) can be utilized. Such wavelengths can generally be in the range of about 300 nm to about 1500 nm; preferably, from about 600 nm to about 1100 nm; more
20   preferably, from about 750 nm to about 850 nm. Peak intensities can generally range from at least about 10^6 W/cm^2. The upper limit on the pulse fluence (energy per pulse per unit area) is generally dictated by the ablation threshold of the photoreactive composition. For example, Q-switched Nd:YAG lasers (for example, a Spectra-Physics Quanta-Ray PRO), visible wavelength dye lasers
25   (for example, a Spectra-Physics Sirah pumped by a Spectra-Physics Quanta-Ray PRO), and Q-switched diode pumped lasers (for example, a Spectra-Physics FC*bar*™) can also be utilized. Preferred light sources are near infrared-pulsed lasers having a pulse length less than about 10 nanoseconds (more preferably, less than about 1 nanosecond; most preferably, less than about 10 picoseconds).
30   Other pulse lengths can be used as long as the peak intensity and fluence criteria given above are met.

          Optical elements useful in carrying out the method of the invention include refractive optical elements (for example, lenses and prisms), reflective

-45-

optical elements (for example, retroreflectors or focusing mirrors), diffractive optical elements (for example, gratings, phase masks, and holograms), diffusers, Pockels cells, wave-guides, wave plates, birefringent liquid crystals, and the like. Such optical elements are useful for focusing, beam delivery, beam/mode

5   shaping, pulse shaping, and pulse timing. Generally, combinations of optical elements can be utilized, and other appropriate combinations will be recognized by those skilled in the art. It is often desirable to use optics with large numerical aperture to provide highly-focused light. However, any combination of optical elements that provides a desired intensity profile (and spatial

10   placement thereof) can be utilized. For example, the exposure system can include a scanning confocal microscope (BioRad MRC600) equipped with a 0.75 NA objective (Zeiss 20X Fluar).

Generally, exposure of the photoreactive composition can be carried out using a light source (as described above) along with an optical system as a

15   means for controlling the three-dimensional spatial distribution of light intensity within the composition. For example, the light from a pulsed laser can be split into two parts and then recombined spatially and temporally at a location within the volume of the reactive composition. The focal point can be scanned or translated in a three-dimensional pattern that corresponds to a desired shape,

20   thereby creating the desired shape. The exposed or illuminated volume of the composition can be scanned either by moving the composition itself or by moving the light source (for example, moving a laser beam using galvo-mirrors).

If the light induces, for example, a reaction of the reactive species that

25   produces a material having solubility characteristics different from those of the reactive species, the resulting image can optionally be developed by removing either the exposed or the unexposed regions through use of an appropriate solvent, for example, or by other art-known means. Complex, three-dimensional objects can be prepared in this manner.

30   Exposure times generally depend upon the type of exposure system used to cause image formation (and its accompanying variables such as numerical aperture, geometry of light intensity spatial distribution, the peak light intensity during the laser pulse (higher intensity and shorter pulse duration roughly

correspond to peak light intensity)), as well as upon the nature of the composition exposed (and its concentrations of photosensitizer, photoinitiator, and electron donor compound). Generally, higher peak light intensity in the regions of focus allows shorter exposure times, everything else being equal.

5   Linear imaging or "writing" speeds generally can be about 5 to 100,000 microns/second using a laser pulse duration of about 10^{-8} to 10^{-15} seconds (preferably, about 10^{-11} to 10^{-14} second) and about 10^2 to 10^9 pulses per second (preferably, about 10^3 to 10^8 pulses per second).

10   **EXAMPLES**

Objects and advantages of this invention are further illustrated by the following examples, but the particular materials and amounts thereof recited in these examples, as well as other conditions and details, should not be construed to unduly limit this invention.

15

Example 1

This example describes a method of separating a writing laser beam into multiple beams and combining the beams at the writing volume, thereby allowing an increase in two-photon writing intensity without the detrimental

20   effects of one-photon absorption in the intervening volumes.

A test sample consisting of a 12.7 centimeters (cm) diameter polished glass wafer, thickness of 8 millimeters (mm), average surface roughness of 0.1 micrometer (μm), provides a base for a polymer coating. A thin layer of unreacted methyl methacrylate (MMA) with a 1% loading of a two-photon

25   initiator (4,4-bis(diphenylamino)-trans-stilbene) covers the polished side of the glass wafer. The photoreactive coating consists of 40% by weight tris (2-hydroxyethylene) isocyanurate triacrylate, 59% by weight MMA, and 1% by weight two-photon absorber dissolved to 40% concentration in a dioxane solvent. This layer of photoreactive material is approximately 100 μm thick.

30   The ultrafast light source is a Spectra Physics Hurricane™ laser, operating at a wavelength of 800 nanometers (nm), pulse repetition rate of 80 megahertz (MHz), output power of 750 milliwatts (mW), and a nominal pulse

width of 100 femtoseconds (fs). Light from this laser source travels through an
optical train splitting the beam into multiple components and recombining the
components through an imaging lens to the focal position of the lens. No
individual component beam retraces the path of any other beam except at the

5　　focal point of the imaging lens. In order to minimize path length differences, a
diffractive mask separates the incident beam into multiple beams.
Recombination of the beams occurs in a confocal imaging system that focuses
the individual beams within a cylindrical volume of approximately 10 μm
radius. The individual beams overlap with good spatial and temporal

10　　characteristics. Micrometer adjustments of the imaging system bring the final
focal position to coincide with the top surface of a sample. The sample moves
relative to the laser beam through an X-Y stage system; the laser beam is
stationary relative to the stage motion. Test patterns consist of linear lines
approximately 5 centimeters (cm) long with adjacent lines spaced

15　　approximately 5 millimeters (mm) apart. Comparative examples using a single
beam to photoreact the two-photon loaded MMA coating are accomplished by
blocking all but one of the individual beams from the diffractive phase mask.

　　　　Exposure of the photoreactive composition on the covered glass wafer
occurs by continuously moving the sample relative to the focal position of the

20　　imaging system. The sample stage moved uniformly at a speed of 100
micrometers per second (μm/s) past the light source. As the light source scans
the phase mask, a single line was photopolymerized in the MMA-containing
layer. Careful visual inspection of the sample in bright light reveals faint lines,
due to a refractive index change between photopolymerized and

25　　unphotopolymerized material. Single and multiple beam photopolymerization
experiments test the threshold for damaging the polymer due to one-photon
absorption processes. Moreover, threshold experiments for 2-photon
photopolymerization test both techniques for equivalence of the writing
thresholds.

30　　　　　Sample exposure occurs at four levels of writing power: threshold, 25X-
threshold, 50X- threshold, and 100X threshold, covering the range of conditions
from initial photopolymerization to damaging the polymer arrangement.

Developing the polymerized coating in a dioxane solvent removes the

unreacted regions from the glass wafer, revealing photoreacted lines. Each

single line is approximately 20 µm thick and approximately 15 µm wide. The

polymeric lines have good adhesion to the glass wafer. Table 1 expresses the

5   results from these experiments.

TABLE 1

Writing Power	Multiple Beam	Single Beam
Threshold	Photoreacted	Photoreacted
25X Threshold	Photoreacted	Photoreacted
50X Threshold	Photoreacted	Damage
100X Threshold	Damage	Damage

10.   Example 2

Unless otherwise noted, chemicals used in Examples 2 and 3 are

commercially available from Aldrich Chemical Co., Milwaukee, WI. Tris(2-

hydroxyethylene)isocyanurate triacrylate is commercially available from

Sartomer Co., West Chester, PA under the tradename SR-368. SR-9008 is an

15   alkoxylated trifunctional acrylate commercially available from Sartomer

Company, Inc., West Chester, PA.

The aromatic iodonium complex salts such as diphenyliodonium

hexafluorophosphate may be prepared by metathesis of corresponding aromatic

iodonium simple salts (such as, for example, diphenyliodonium bisulfate) in

20   accordance with the teachings of Beringer et al., *J. Am. Chem. Soc., 81,* 342

(1959). Thus, for example, the complex salt diphenyliodonium tetrafluoroborate

is prepared by the addition at 60°C of an aqueous solution containing 29.2

grams (g) silver fluoroborate, 2 g fluoroboric acid, and 0.5 g phosphorous acid

in about 30 milliliters (mL) of water to a solution of 44 g (139 millimoles) of

25   diphenyliodonium chloride. The silver halide that precipitates is filtered off and

the filtrate concentrated to yield diphenyliodonium fluoroborate which may be

purified by recrystallization.

The two-photon sensitizing dye, bis-[4-(diphenylamino)styryl]-1,4-
(dimethoxy)benzene is prepared as follows: *(1) Reaction of 1,4-bis-
bromomethyl-2,5-dimethoxybenzene with triethyl phosphite* (Horner Eamons
reagent): 1,4-bis-bromomethyl-2,5-dimethoxybenzene is prepared according to

5   the literature procedure (Syper et. al., *Tetrahedron*, 1983, *39*, 781-792). 1,4-bis-
bromomethyl-2,5-dimethoxybenzene (253 g, 0.78 mol) is placed into a 1000-
mL round bottom flask. Triethyl phosphite (300 g, 2.10 mol) is added. The
reaction is heated to vigorous reflux with stirring for 48 hours under nitrogen
atmosphere. The reaction mixture is cooled and the excess P(OEt)$_3$ is removed

10   under vacuum using a Kugelrohr apparatus. The desired product is not actually
distilled, but the Kugelrohr is used to remove the excess P(OEt)$_3$ by distilling it
away from the product. Upon heating to 100°C at 0.1 mmHg a clear oil results.
Upon cooling the desired product solidifies. The product is suitable for use
directly in the next step, and ^{1}H NMR is consistent with the proposed structure.

15   Recrystallization from toluene yields colorless needles and results in a purer
product, but this is not necessary for subsequent steps in most cases.
(2) Synthesis of Bis-[4-(diphenylamino)stryl]-1,4-(dimethoxy)benzene: A 1000-
mL round bottom flask is fitted with a calibrated dropping funnel and a
magnetic stirrer. The flask is charged with the product from the above synthesis

20   (a Horner Eamons reagent) (19.8 g, 45.2 mal), and it is also charged with N,N-
diphenylamino-p-benzaldehyde (Fluka, 25 g, 91.5 mmol). The flask is flushed
with nitrogen and sealed with septa. Anhydrous tetrahydrofuran (750 mL) is
cannulated into the flask and all solids dissolved. The dropping funnel is
charged with KOtBu (potassium t-butoxide) (125 mL, 1.0 M in THF). The

25   solution in the flask is stirred and the KOtBu solution is added to the contents of
the flask over the course of 30 minutes. The solution is then left to stir at
ambient temperature overnight. The reaction is then quenched by the addition
of H$_2$O (500 mL). The reaction continues to stir and after about 30 minutes a
highly fluorescent yellow solid forms in the flask. The solid is isolated by

30   filtration and air-drying. It is then recrystallized from toluene (450 mL). The
desired product is obtained as fluorescent needles (24.7 g, 81% yield). ^{1}H NMR
is consistent with the proposed structure.

The test substrate consists of a photoreactive composition coated on to one side of an optically transparent microscope slide. To promote polymer adhesion, a 2% solution of trimethoxysilylpropylmethacrylate in aqueous ethanol (pH of approximately 4.5) is spun coat on the substrates, which are then baked in a 130°C oven for 10 min. A thin layer of the photoreactive composition (see Table 2), 40% by weight of solids in dioxane (available from Mallinckrodt Baker, Phillipsburg, NJ), is then spun coat over the entire wafer and baked in an 80°C oven to remove the solvent. The final layer of photoreactive coating is approximately 60 μm thick.

TABLE 2: Photoreactive composition for Examples 2 & 3

Ingredient	Weight %
Poly(styrene-co-acrylonitrile) (MW ~ 165,000 g/mol)	26.55
SR-368 (Sartomer Co., West Chester, PA)	35.40
SR-9008 (Sartomer Co., West Chester, PA)	35.40
Diphenyliodonium hexafluorophosphate	1.77
Bis-[4-(diphenylamino)stryl]-1,4-(dimethoxy)benzene	0.88

The light source used for Examples 2 and 3 is a diode pumped Ti:sapphire laser (Spectra-Physics) operating at a wavelength of 800 nm, pulse width 100 fs, pulse repetition rate of 80 MHz, beam diameter of approximately 2 mm, and an average output power of 860 mW. The optical train (similar to the diagram of Figure 1a) splits the original light beam into two parts by use of a beam splitter. Low-dispersion mirrors are used to steer the beams toward the sample; a translation stage containing one or more mirrors provides adjustment for precise matching of pathlengths. Optical attenuators (located in each beam path) are used to vary the optical power of the beams. Aspheric lenses (focal length = 15.36 mm, NA = 0.16) are used to focus each beam into the photoreactive composition. The two beams have linear polarization states that are parallel when the beams are combined.

For these test substrates, photoreacting is accomplished by superimposing the focal spots formed by each objective lens at the substrate/polymer interface. Overlap of the focal spots in time and space is verified by observation of the intensity of fluorescence from the photoreactive

5   reactive composition. The situation where the beams overlap in space (but not time) is demonstrated by a doubling of the fluorescence (compared to the fluorescence resulting from a single beam). When ideal conditions are reached (and the beams overlap in space and time) a quadrupling of the fluorescence is observed. The optical power in each beam is then reduced until the

10   photoreactive reaction occurs only for overlap in space and time; individual beams do not cause a reaction.

Exposure of the photoreactive composition covered sample occurs by continuously moving the sample such that the superimposed focal spots always remained at the substrate/polymer interface. The test structures consist of

15   continuously scanned lines that are 0.5 to 5 cm long with 0.0625 cm spacing between the lines, with all lines lying in the same plane. Each line is the result of a single pass of energy from the laser. Developing the reacted polymeric coating using N,N-dimethyl formamide removes the unreacted regions from the substrate, revealing photoreacted lines. Moreover, the photoreacted lines

20   exhibit good adhesion to the substrate.

In this example (as shown in Figure 1a), the two beams are incident from the same side of the photoreactive reactive composition. The angle between the two beams is varied from nearly zero (limited by the ability of the objective lenses to be brought into close proximity to each other) to nearly 180

25   degrees (limited by the ability of the objective lenses to be brought into close proximity to the photoreactive composition). As described in the detailed description of preferred embodiments, changing the direction from which the beams are incident allows the reacting of volumetric regions having different shapes.

30

Example 3

In this example the sample preparation, laser source and optical train are identical to those described above in Example 2. In this case the photoreactive

composition is placed between the focusing lenses (as shown in Figure 1b) so that the light beams are incident upon the reacting region from opposite sides of the substrate. The angle between the incident beams (170a and 170b in Figure 1b) is varied from nearly zero (both beams arrive at glancing angles to the

5   substrate) to nearly, but not quite, 180 degrees. As described in the detailed description of preferred embodiments, changing the direction from which the beams are incident allows the reacting of volumetric regions having different shapes.

The complete disclosures of the patents, patent documents, and

10   publications cited herein are incorporated by reference in their entirety as if each were individually incorporated. Various modifications and alterations to this invention will become apparent to those skilled in the art without departing from the scope and spirit of this invention. It should be understood that this invention is not intended to be unduly limited by the illustrative embodiments

15   and examples set forth herein and that such examples and embodiments are presented by way of example only with the scope of the invention intended to be limited only by the claims set forth herein as follows.

WHAT IS CLAIMED IS:

1.   A method for enhancing photoreactive absorption in a specified volume
element of a photoreactive composition, the method comprising:

        providing a photoreactive composition;

5   providing a source of light sufficient for simultaneous absorption of at
least two photons by the photoreactive composition, the light source having a
beam capable of being divided;

        dividing the light beam into a plurality of equal path length exposure
beams; and

10   focusing the exposure beams in a substantially non-counter propagating
manner at a single volume element of the photoreactive composition
simultaneously to react at least a portion of the photoreactive composition.

2.   The method of claim 1 wherein the photoreactive composition
15 comprises a reactive species.

3.   The method of claim 2 wherein the reactive species is a photoreactive
species.

20 4.   The method of claim 1 wherein the photoreactive composition
comprises a photoreactive photosensitizer.

5.   The method of claim 1 wherein the photoreactive composition
·comprises an electron donor compound.

25

6.   The method of claim 1 wherein the photoreactive composition
comprises a photoinitiator.

7.   The method of claim 1 wherein the photoreactive composition
30 comprises about 5% to about 99.79% by weight of the at least one reactive
species, about 0.01% to about 10% by weight of the at least one photoreactive
photosensitizer, up to about 10% by weight of the at least one electron donor

compound, and about 0.1% to about 10% by weight of the at least one
photoinitiator, based upon the total weight of solids.

8.   The method of claim 1 wherein the light source comprises a pulsed
5   laser.

9.   The method of claim 1 wherein focusing the exposure beams in a
substantially non-counter propagating manner comprises directing the exposure
beams from opposite sides of the photoreactive composition.
10

10.   A method for reacting a photoreactive composition, the method
comprising:
        providing a photoreactive composition capable of photoreactive
absorption; and
15   exposing the photoreactive composition to laser light from a plurality of
substantially non-counter propagating directions simultaneously, wherein the
light overlaps in time and space at a predetermined focus spot.

11.   The method of claim 10 wherein the photoreactive composition
20   comprises a reactive species.

12.   The method of claim 11 wherein the reactive species is a photoreactive
species.

25   13.   The method of claim 10 wherein the photoreactive composition
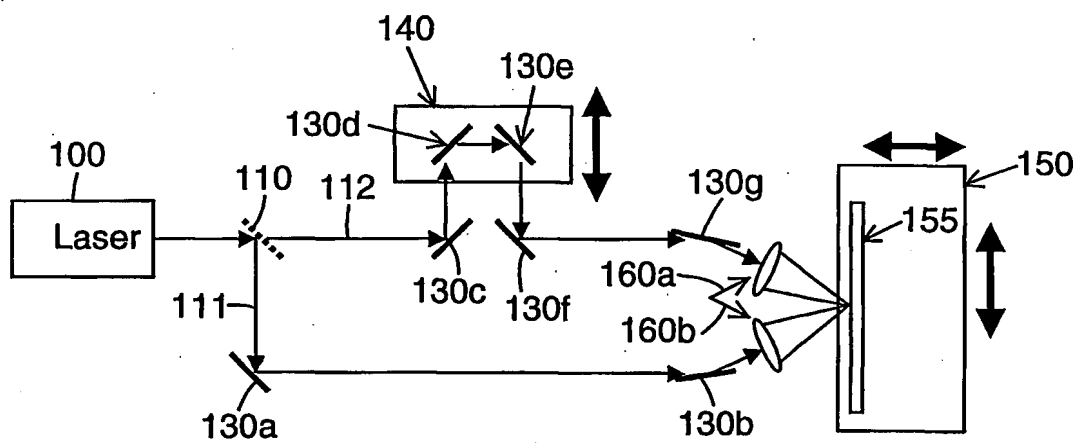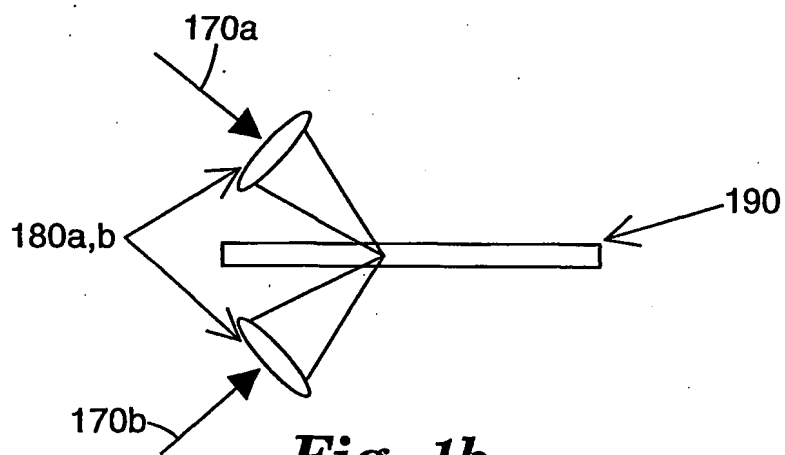comprises a photoreactive photosensitizer.

14.   The method of claim 10 wherein the photoreactive composition
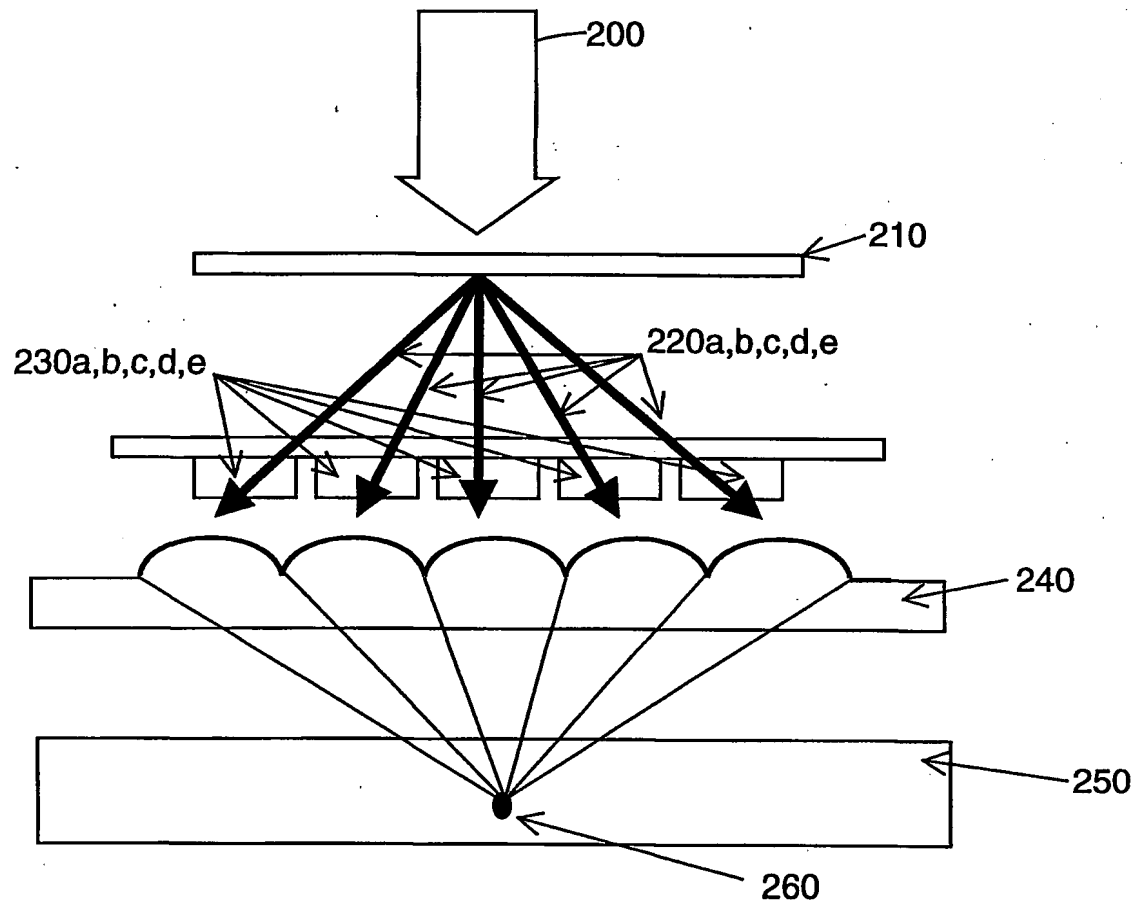comprises an electron donor compound.
30

15.   The method of claim 10 wherein the photoreactive composition
comprises a photoinitiator.

16.   The method of claim 10 wherein the photoreactive composition comprises about 5% to about 99.79% by weight of the at least one reactive species, about 0.01% to about 10% by weight of the at least one photoreactive photosensitizer, up to about 10% by weight of the at least one electron donor compound, and about 0.1% to about 10% by weight of the at least one photoinitiator, based upon the total weight of solids.

17.   The method of claim 10 wherein the laser comprises a pulsed laser.

18.   The method of claim 10 wherein exposing the photoreactive composition comprises directing the laser light from opposite sides of the photoreactive composition.

19.   A method for enhancing photoreactive absorption in a specified volume element of a photoreactive composition, the method comprising:

providing a photoreactive composition;

providing light sufficient for simultaneous absorption of at least two photons by the photoreactive composition; the light comprising at least two exposure beams;

focusing the exposure beams in a substantially non-counter propagating manner at a single volume element of the photoreactive composition simultaneously to react at least a portion of the photoreactive composition.

20.   The method of claim 19 wherein the light comprises one or more lasers.

21.   The method of claim 20 wherein each laser provides at least one exposure beam.

22.   The method of claim 19 further comprising providing optical delay elements to control the relative delay between each pulse and the location of the focal point of each beam.

Fig. 1a

Fig. 1b

Fig. 2